

Track light SFC series 10W GS-TL10WCC45A



Exploded diagram



Product parameter

LED power	: 9W(36vDC 250mA)
Lamp consumption	: 10W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
Size	: φ45*L154mm
Material	: Aluminum
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 24-32°





2700K | 3000K | 3500K | 4000K | 5000K | 6000K

Dimmable

Single color dimmable TRIAC/0-10V/DALI


1800-3000K dim to warm TRIAC/0-10v




Datasheet

Part No.	COB brand	CCT	Output			Profile
			CRI80	CRI90	CRI97	
GS-TL10WCC45AB	Bridgelux V4HD	2700K-7000K single color	300-350lm	250-300lm	200-250lm	24-32°
GS-TL10WCC45AC	CLU702-1202C9		300-350lm	250-300lm	200-250lm	
GS-TL10WCC45ATP	TYANSHINE	3000k/4000k/5700k	no	220-250lm	no	
GS-TL10WCC45ATC		2700-5700k tunable				

Packing

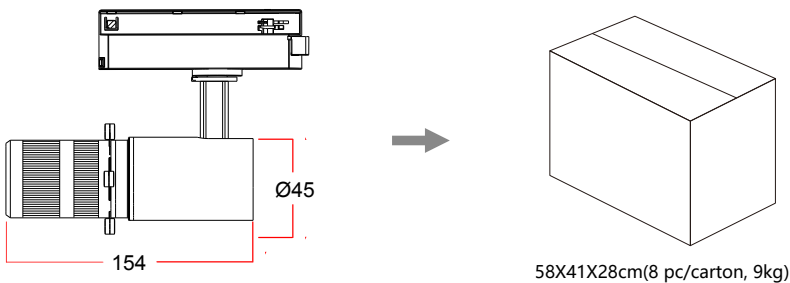

Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

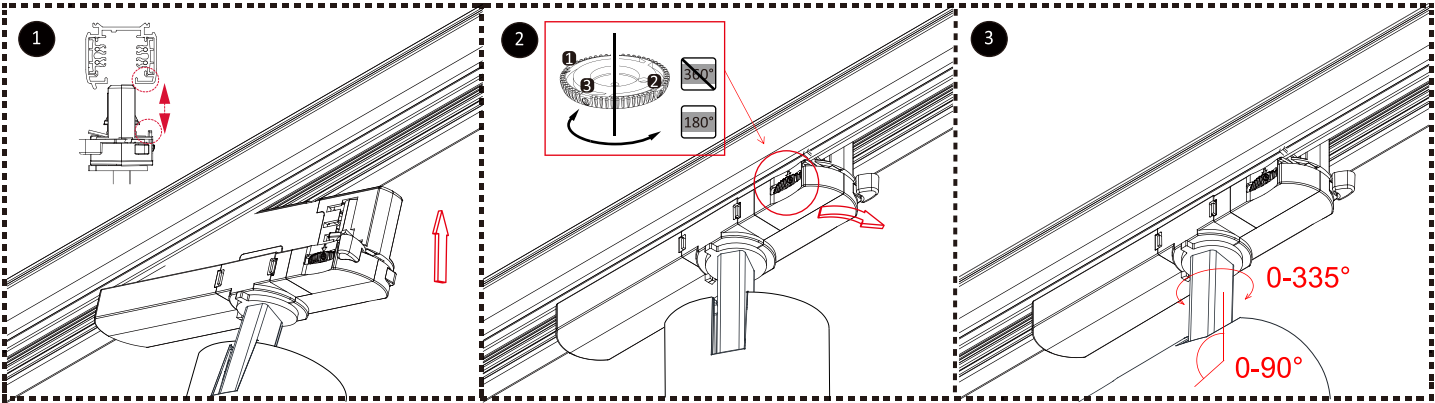

1. Make the power adaptor set to OFF, Embed the track light on the track rails.
2. Turn the handle 90° degrees according to the direction as shown in the up picture, make sure the adaptor be locked in the track rails.
3. Finish installing.

Project display

Solemnly state: below are our real cases, for more information, please contact us.

