

Track light SFC series 20W GS-TL20WCC66






Exploded diagram



Product parameter


LED power	: 18W(36vDC 500mA)
Lamp consumption	: 20W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
Size	: φ66*L200mm
Material	: Aluminum
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 22-32°/40°

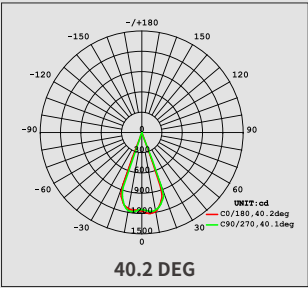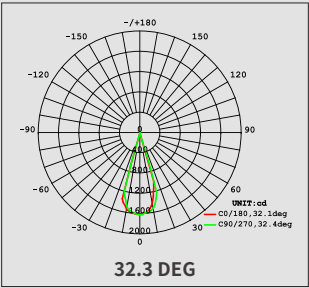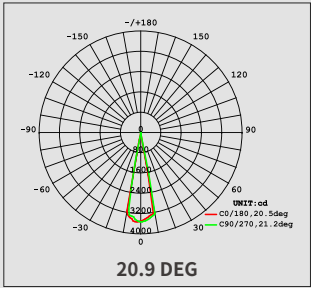


Datasheet

Part No.	COB brand	CCT	Output			Profile
			CRI80	CRI90	CRI97	
GS-TL20WCC66B	Bridgelux V6HD	2700K-7000K single color	450-550lm	400-500lm	350-400lm	22-32° /40°
GS-TL20WCC66C	CLU702-1202C9		450-550lm	400-500lm	350-400lm	
GS-TL20WCC66TP	TYANSHINE	3000k/4000k/5700k	no	220-250lm	no	
GS-TL20WCC66TC		2700-5700k tunable				

Packing

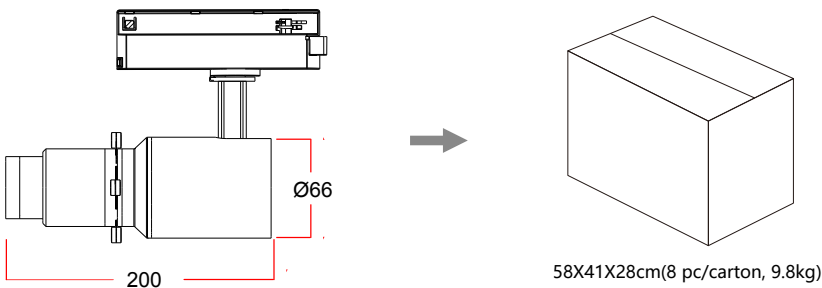

Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

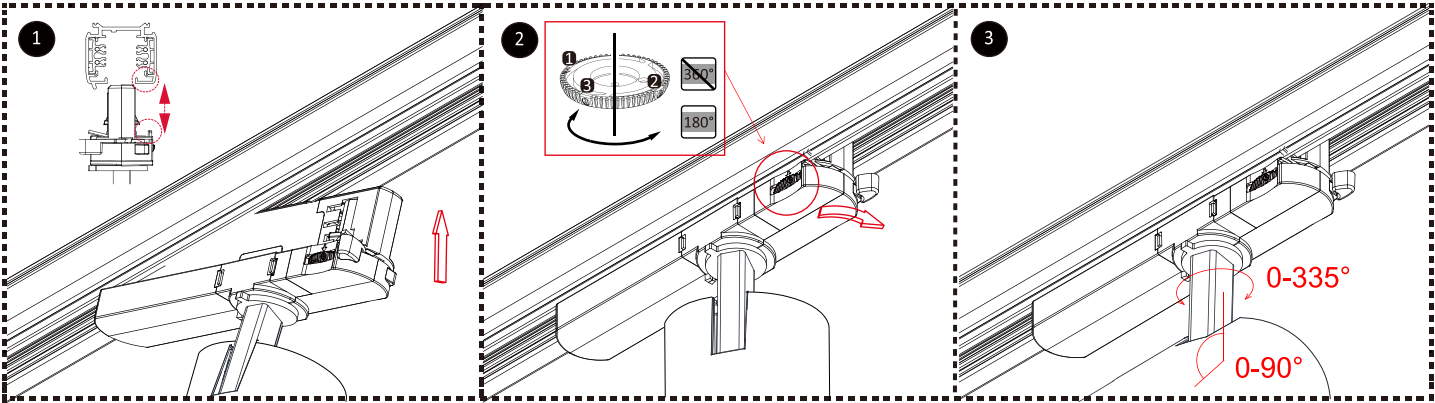

1. Make the power adaptor set to OFF, Embed the track light on the track rails.
2. Turn the handle 90° degrees according to the direction as shown in the up picture, make sure the adaptor be locked in the track rails.
3. Finish installing.

Project display

Solemnly state: below are our real cases, for more information, please contact us.

