


Flex Led Neon Light

N1615D-TOP



Product Specification

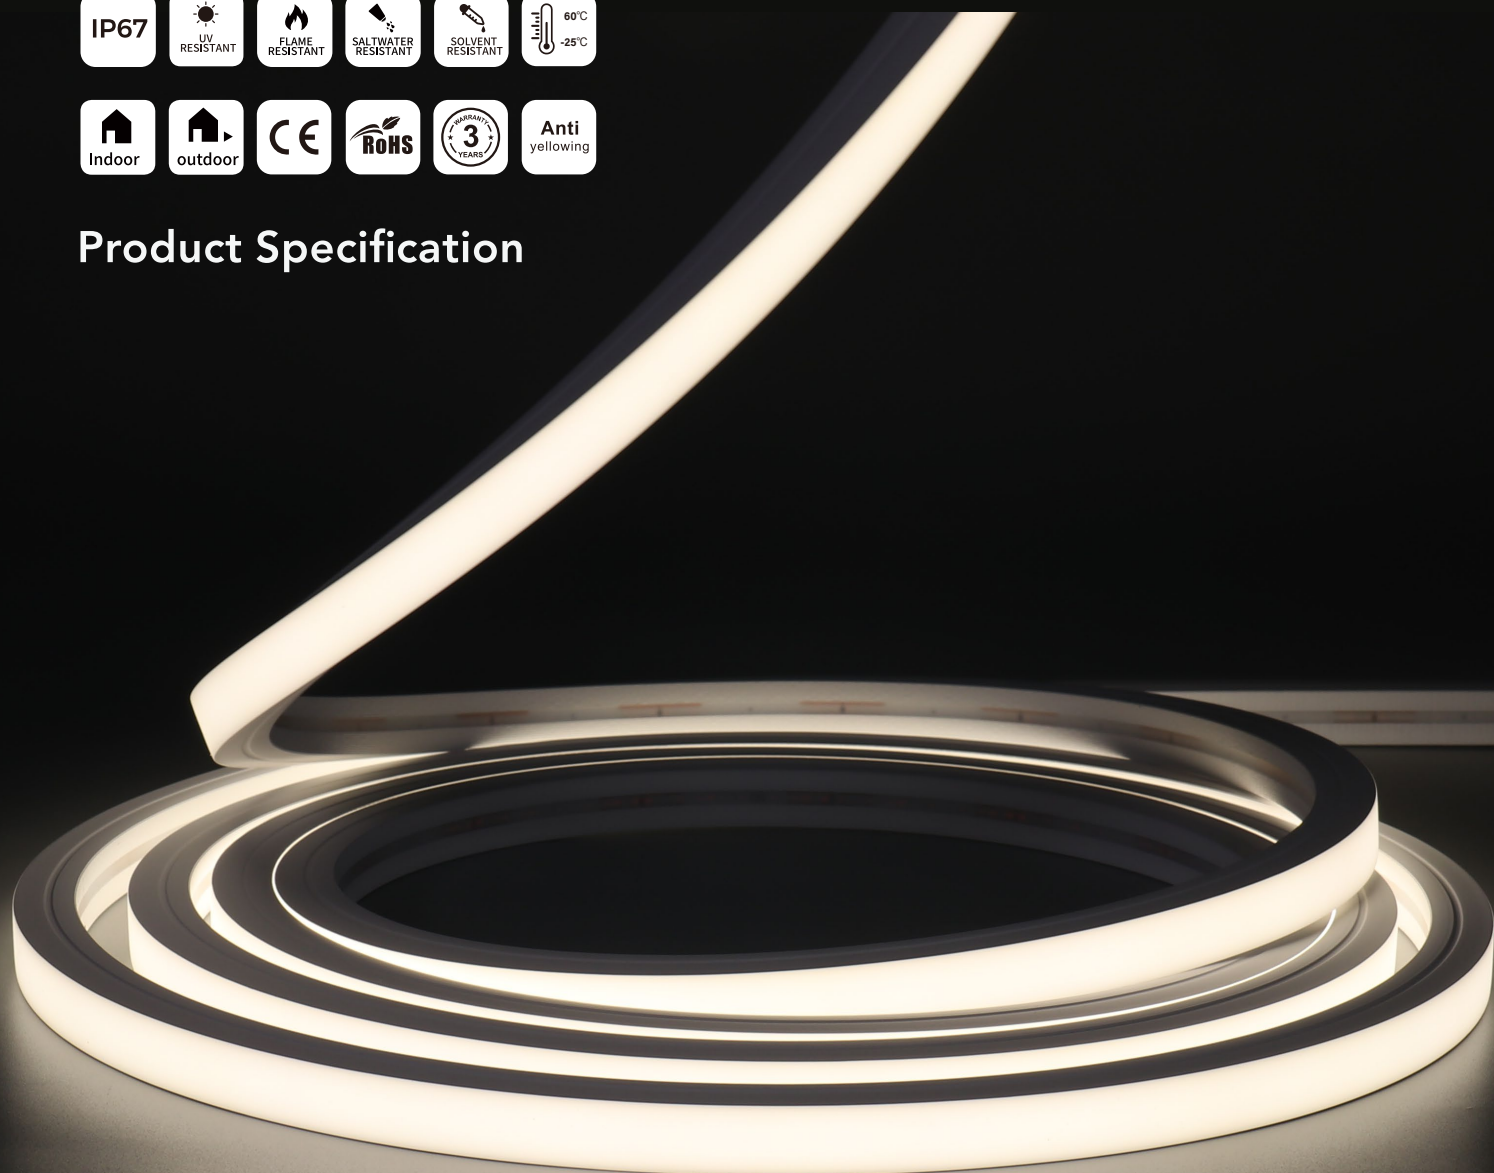


LED strip colloid specifications comparison

Materials Main parameters	Silicone flexible led strip	PVC flexible led strip	Notes
Colloid features in -40℃	No crack after 30 days	Totally cracked	The low temperature resistant of silicone is superior than PVC or epoxy materials
Colloid features in 120℃	No obvious change after 72 hours	Colloid changed into yellow and deformed after 2 hours	The high temperature resistant of silicone is superior than PVC or epoxy
Colloid features in 180℃	No obvious change after 72 hours	Colloid changed into brown and some melted after 20 minutes	Over 150℃ , PVC is easily hydrolyzed, Viscosity becomes weaken and easily seperated
Steadily lighted in Seawater for 72 hours	No obvious change	Serious atomization on the surface	The waterproof grade of silicone led strip can reach to IP67, high resistance to acidic alkali and salt properties
Thermal conductivity	Good thermal conductivity	No thermal conductivity	Pvc and epoxy cannot conduct heat, while silicone has good thermal conductivity

Product features


- Anti-yellowing and heat resisting silicone glue, chemical resistance acid and alkaline,available for extremely terrible outdoor environment.
- Uniform and soft luminance, no light spot.
- Super brightness large chip, golden wire welded and copper led holder for quicker heat dissipation, higher stability, longer life span.
- Leadless SMT technique (RoHS certificated), smooth welding joint, firm connection of led and pcb.

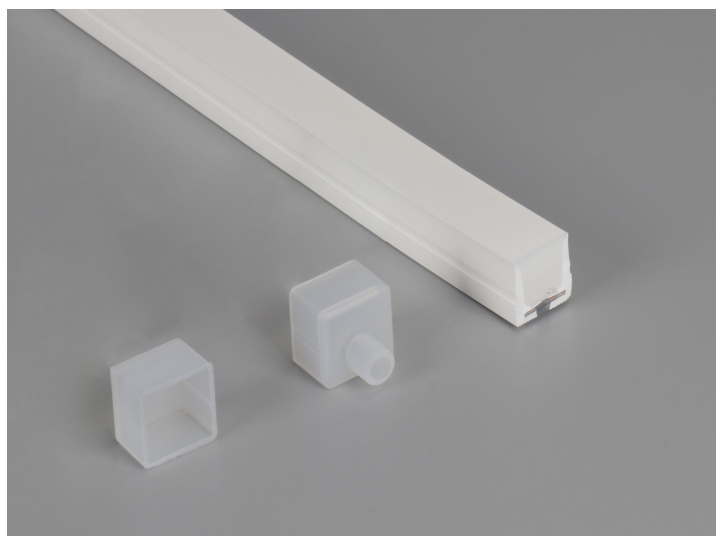

Specification




Bending (Silicone)

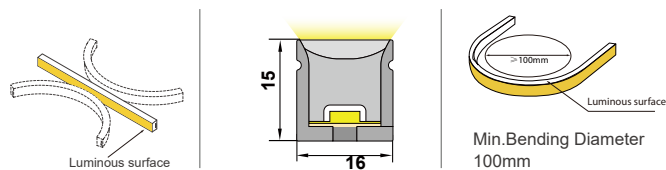

Model Number	N1615D-TOP	Size (mm)	16*15
PCB Limited (mm)	12mm	IP Grade	IP67
Working Temperature	-25 to 60°C	N.W.(G/M)	270g

Dimensions of light

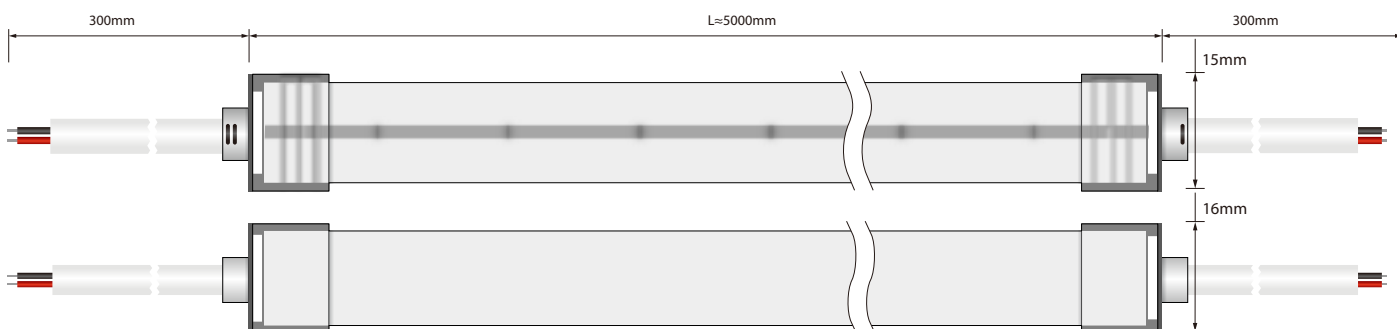

VARIOUS CONNECTIONS

Injection molded endcap.



front cable entry



side cable entry



bottom entry



closed

Silicone glue endcap




front cable entry



side cable entry



bottom entry



closed

VARIOUS CONNECTIONS

Field install endcap






front cable entry





closed

Recommend LED strip parameters




1) N1615D-TOP-WHT

SMD2835, 120 LED/meter								
Part number	Color	Luneh/M (LEDS)	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
2835FW120-24V	WW 	946	50mm	6	120	24V	14.4W	5 meters from one end
	NW 	1000						
	CW 	982						







2) N1615D-TOP-TW

SMD3527, 120LED/meter, Dual color.								
Part number	Color	Luneh/M (LEDS)	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
3527-120-24V	WW 	357	50mm	6	120	24V	14.4W	5 meters from one end
	CW 	402						

4) N1615D-TOP-RGB




3528 RGBW LED Strip, 120 LED/Meter								
Part number	Color	Luneh/M (LEDS)	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
3528RGB-120-24V	Red 	80	50mm	6	120	24V	14.4W	5 meters from one end
	Green 	238						
	Blue 	56						

3) N1615D-TOP-RGBW


5050 RGBW, 96 LED/Meter								
Part number	Color	Luneh/M (LEDS)	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
5050RGBW-96-24V	Red 	65	62.5mm	6	96	24V	15W	5 meters from one end
	Green 	181						
	Blue 	35						
	WW 	184						
	NW 	193						
	CW 	191						

Recommend LED strip parameters


5) N1615D-TOP-SPIRGB

5050 RGB, 84 LED/Meter								
Part number	Color	Luneh/M (LEDS)	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
5050RGBIC-84-24V	Red 	80	71.43mm	6	84	24V	15W	5 meters from one end
	Green 	238						
	Blue 	56						


N1615D-TOP-Accessories




LED profile:
1m/pc




Mounting clip
(Optional)




Curved profile
1m/pc




Glue




Closed silicone
endcap



Silicone endcap
-bottom



Silicone endcap
-front



Silicone endcap
-side

Cable

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
PVC Cable		OD: 4.0mm /Inner core: 20AW/G		Red V+,Black V-
		OD: 4.5mm /Inner core: 20AW/G		Black V+,White W,Yellow WW
		OD: 4.5mm /Inner core: 20AW/G		Black V-,Red V+,Green DATA
		OD: 4.5mm /Inner core: 20AW/G		Black V+,Blue B,Green G,Red R
		OD: 6.0mm /Inner core: 20AW/G		Black V+,White W,Blue B,Green G,Red R

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
Silicone Cable		OD: 6.0mm /Inner core: 18AW/G		Red V+,Black V-
		OD: 6.0mm /Inner core: 20AW/G		Black V+,White W,Yellow WW
		OD: 6.0mm /Inner core: 20AW/G		Black V-,Red V+,Green DATA
		OD: 6.0mm /Inner core: 20AW/G		Black V+,Blue B,Green G,Red R
		OD: 6.6mm /Inner core: 20AW/G		Black V+,White W,Blue B,Green G,Red R

Note: For more accessories, please contact our sales.

Driver & Cotronller




Order code: XLG-150-24-A
AC100-305V DC24V 150W
IP67, Global certification.
Non Dimmable.



Order code: ELG-150-24B
AC100-305V DC24V 150W
IP67, Global certification
3in1 dimming function: 0-10Vdc,
10V PWM signal and resistance.



Order code: ELG-150-24DA
AC100-305V DC24V 150W
IP67, Global certification
Dali control technology.

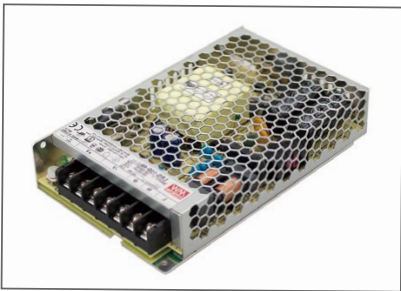

Order code: ELG-150-24DA
AC100-305V DC24V 150W
IP67, Global certification
Dali control technology.



SD Card programe controller. SMD
Capacity supports 128MB-32GB



For RGB IC- SP105E Magic controller
*For more info please contact our
sales



RGB+W controller: 4 Channel
DC12V/24V, 6A, RGB+W, RF remote
with finger touch ring.



RGB Controller: 3 Channel
DC12V/24V, 6A RGB controller, RF
remote with finger touch ring. .




Dimmer:1 Channel DC12V/24V, 6A,
Dimmer, RF remote with finger touch
ring.




CCT Adjustable- 2 Channel
DC12V/24V,6A, CCT adjustable, RF
remote with finger touch ring.


Product system solutions

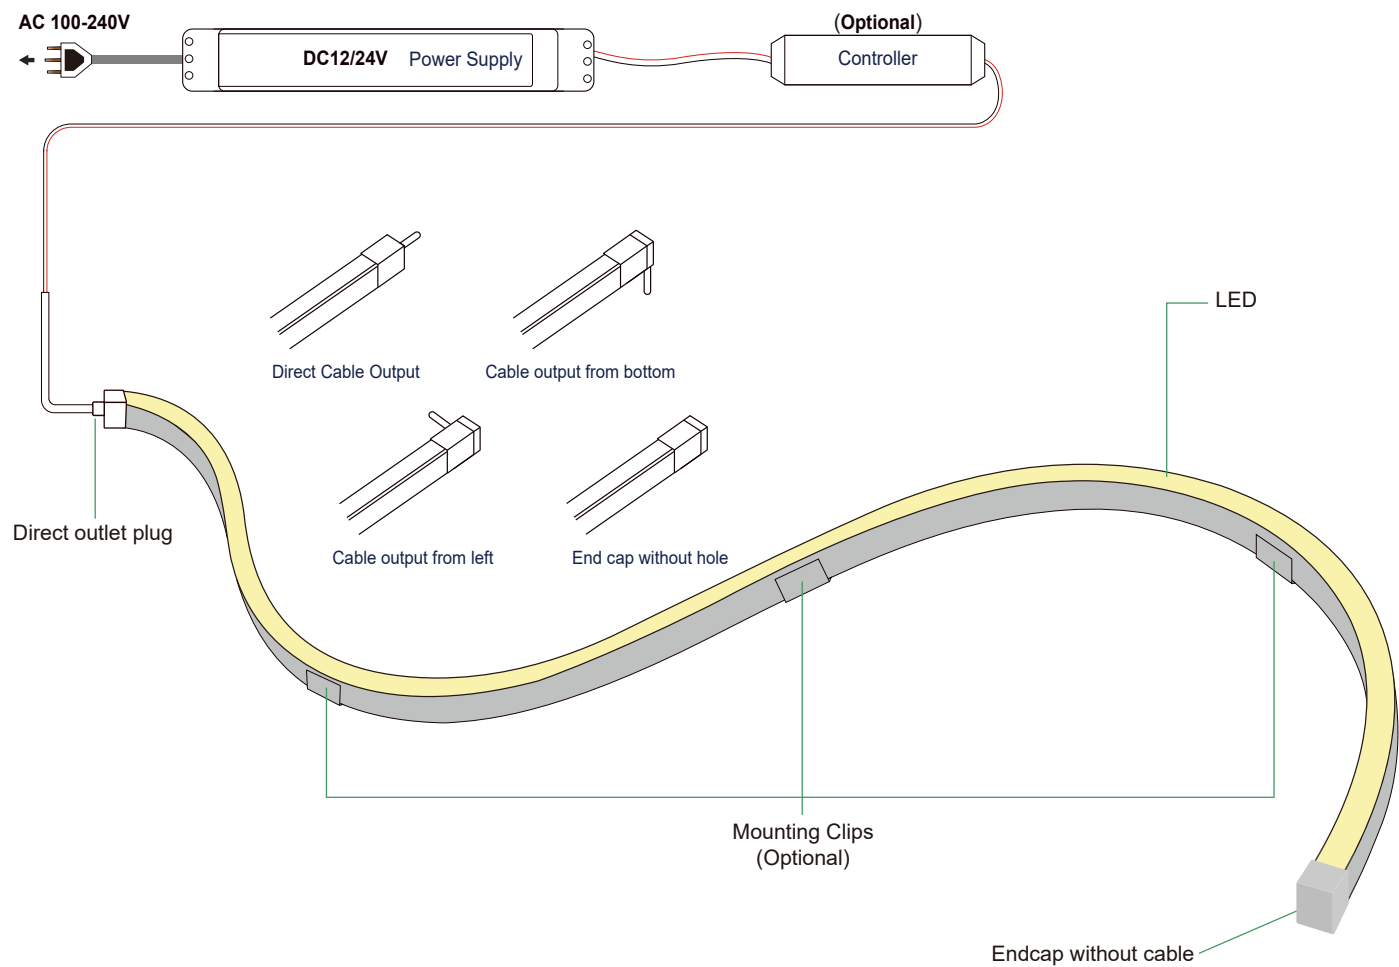


Cut mark

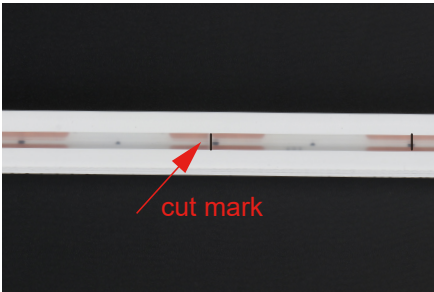

Remarks: There is a transparent window at the bottom of the light strip,

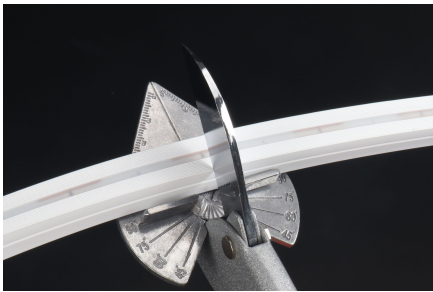


Make precise vertical cuts at the exact cut position of the light strip.

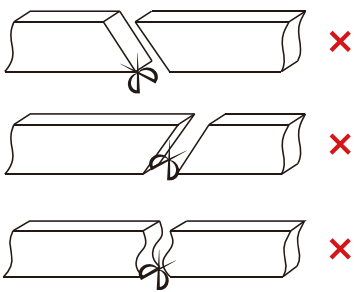

Please do not arbitrarily cut or cut into a bevel and arc section.



Installation

This product is suitable for surface mounting or embedded sealing installation. Recommended slot size: Width 16mm, Depth 15mm, gently press the neon sleeve into the slot.

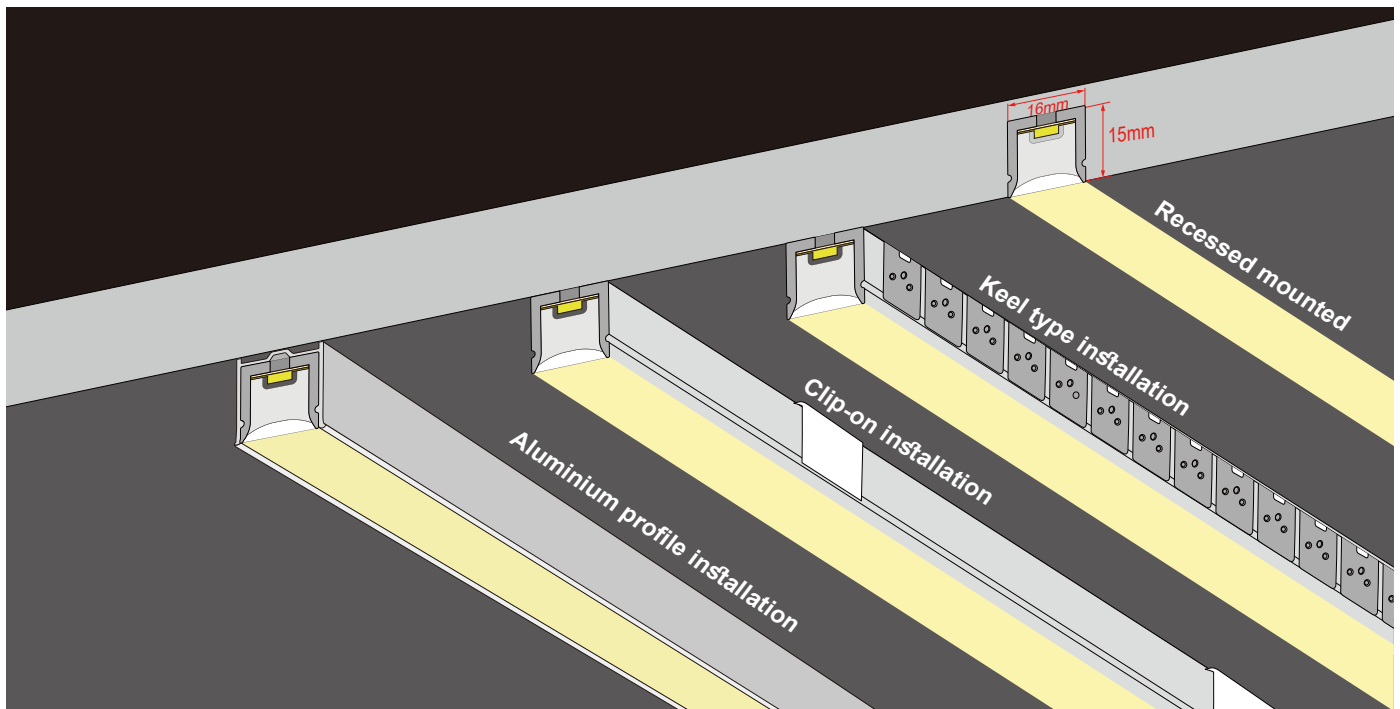


Installation of carrier



1. When installing the LED strip, install it from both ends at the same time, installation from one direction is prohibited.

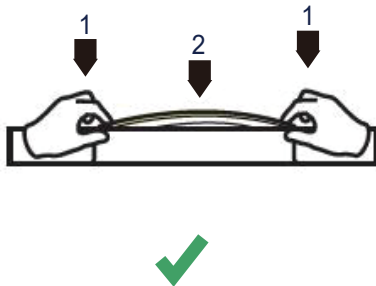


⚠ If the length of LED strip is over 2m, it is recommended to install by two persons.

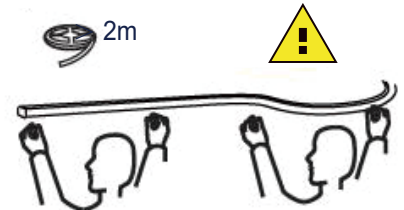

2. Use tool to disassemble carefully, and do not pull the LED strip directly.

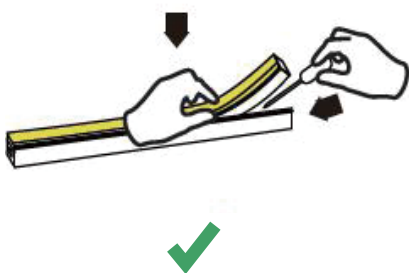


⚠ If the length of LED strip is over 2m, it is recommended to disassemble by two persons.

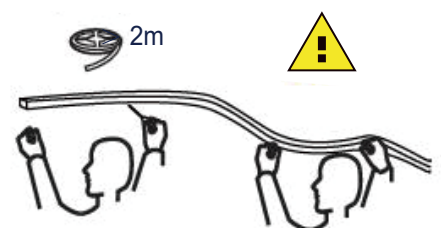



Cautions

- Please notice that the strips are not bendable to all directions. As the appropriate specific shape and degree, please follow the following instruction.
- LED strips are low voltage products, you must use the power supply (transformer). Please don't connect the led strip directly to the AC 110V or AC 220V. Otherwise, it will burn out the LED strips and lead to safety (security) accidents.
- Please read the specifications thoroughly before installation by professional staff to make sure the safe use.

Wrong bending way

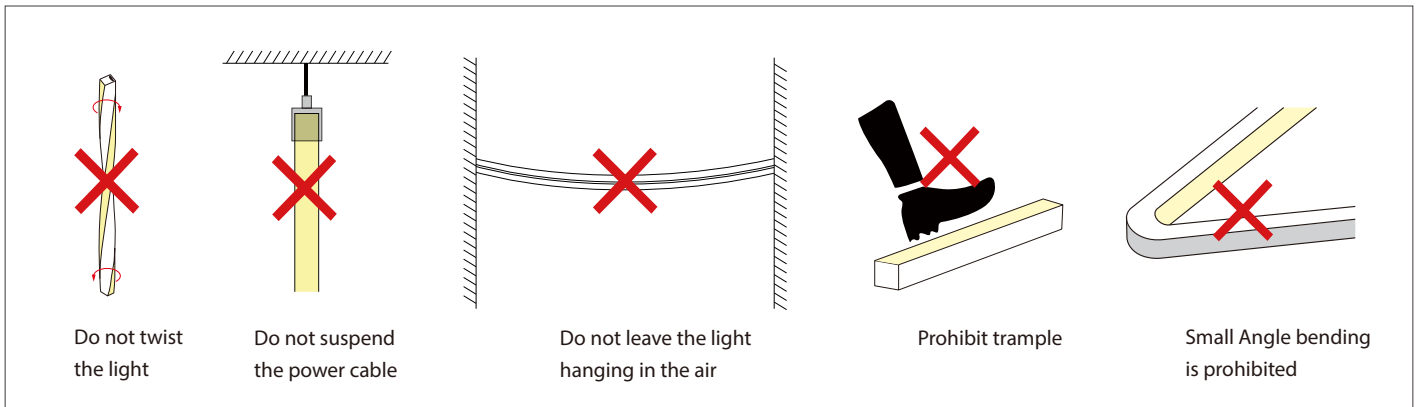

Correct bending way

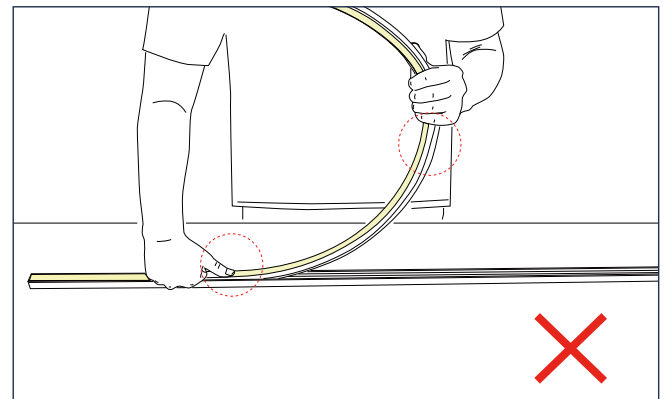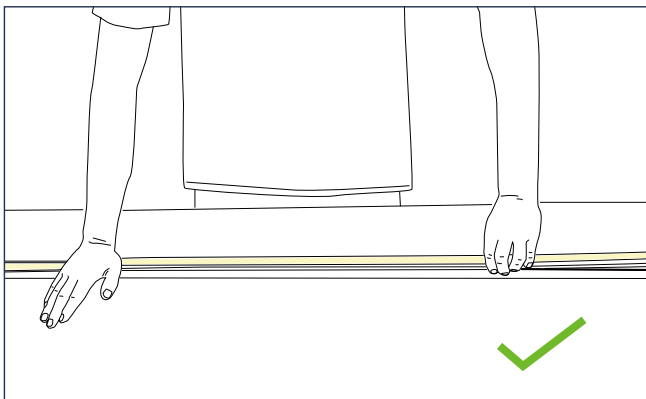


- Please press the led strip with your palm to slowly insert the led strip into the groove, and gently straighten the led strip above the groove with your right hand.
- Try to keep the led strip in a flat state during the installation process.

- Do not press the led strip with a single finger, it is easy to damage the internal parts of the led strip.
- The bent arc of the led strip should not be too large during installation.

Installation Precautions -- Side Mounted

(If the length of the light is more than 2 meters, two persons must work together to install it.)

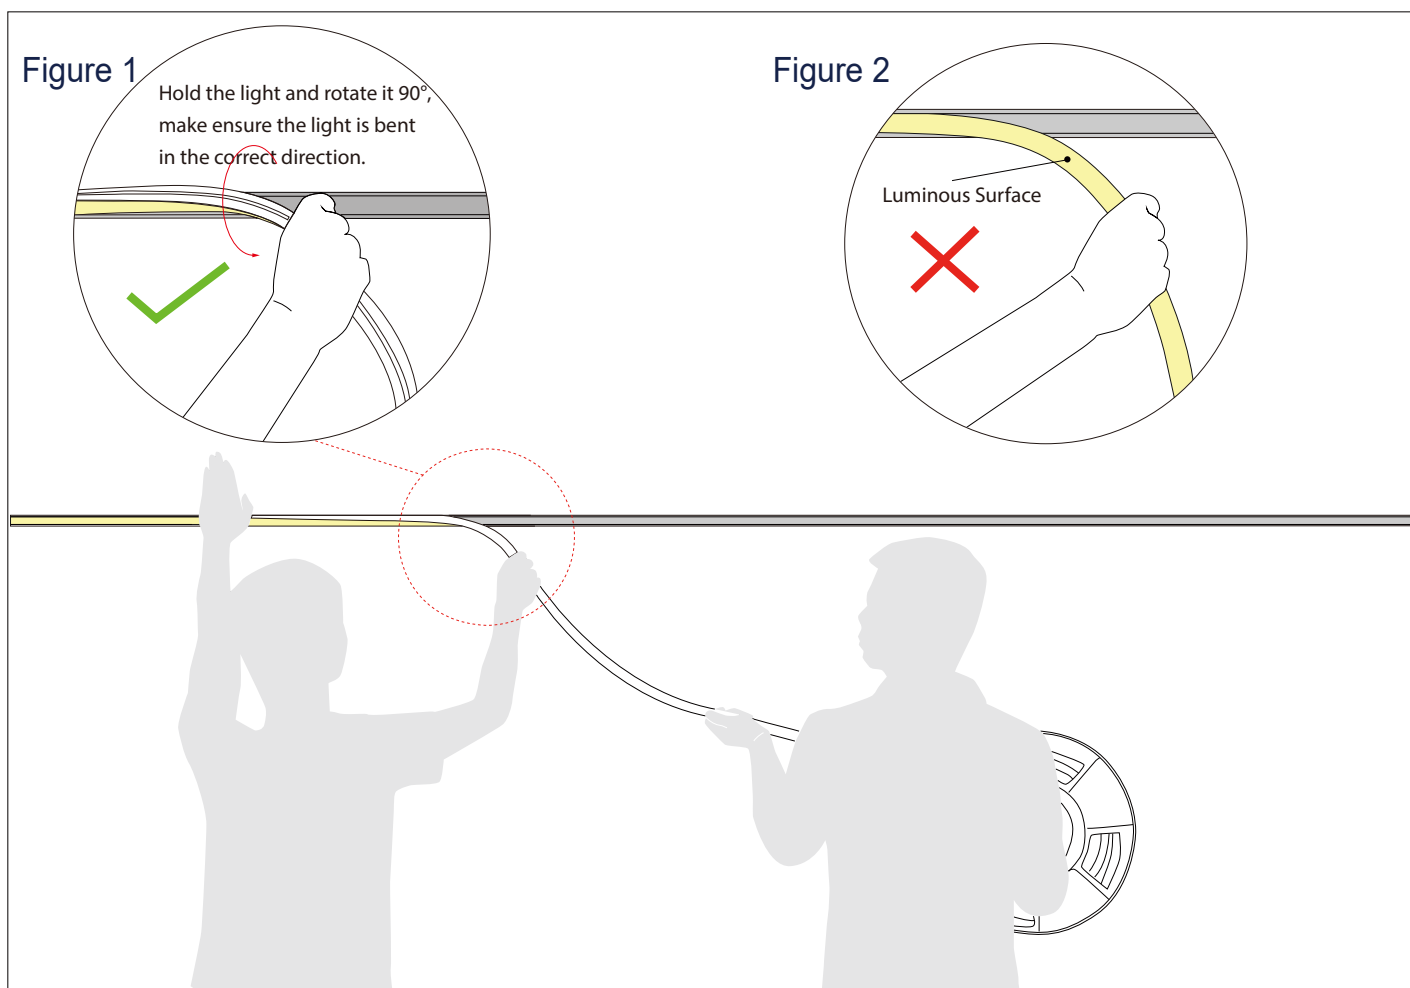

1. Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90° to droop it in the direction of your hand. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2. Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

Package of neon strip (5M/Roll)

