


Track light SFC series 25W GS-TL25WCC77



Exploded diagram

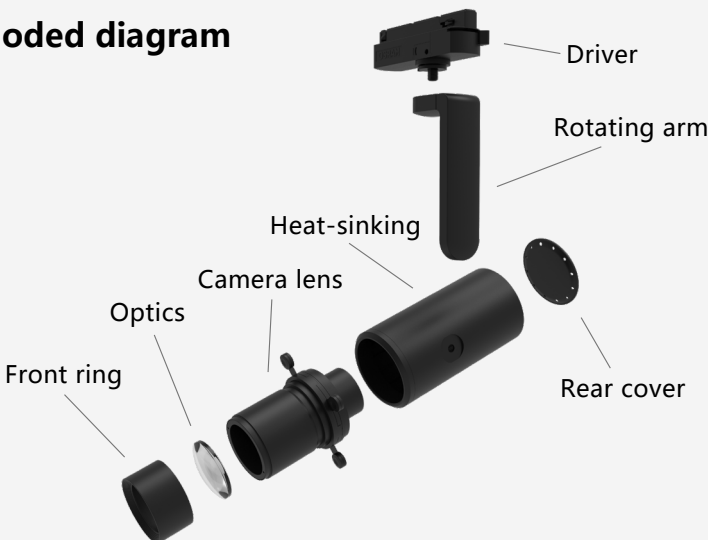

Product parameter

- LED power : 21.6W(36vDC 600mA)
- Lamp consumption : 25W
- Adapter : 3 phase(4-wire, 6-wire)
- Input voltage : 200-240vAC
- Size : φ77*L258mm
- Material : Aluminum
- Life span : 50,000 hrs
- Warranty : 5 years
- Beam angle : 45°




2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable

Single color dimmable TRIAC/0-10V/DALI


1800-3000K dim to warm TRIAC/0-10v




Datasheet

Part No.	COB brand	CCT	Output			Profile
			CRI80	CRI90	CRI97	
GS-TL25WCC77B	Bridgelux V13C	2700K-7000K single color	950-1100lm	880-1100lm	700-800lm	45°
GS-TL25WCC77H	GOSUN 1208H		no	950-1100lm	no	
GS-TL25WCC77C	CITIZEN 1206		950-1100lm	880-1100lm	700-800lm	
GS-TL25WCC77TP	TYANSHINE	3000k/4000k/5700k	no	800-900lm	no	
GS-TL25WCC77TC		2700-5700k tunable				

Packing

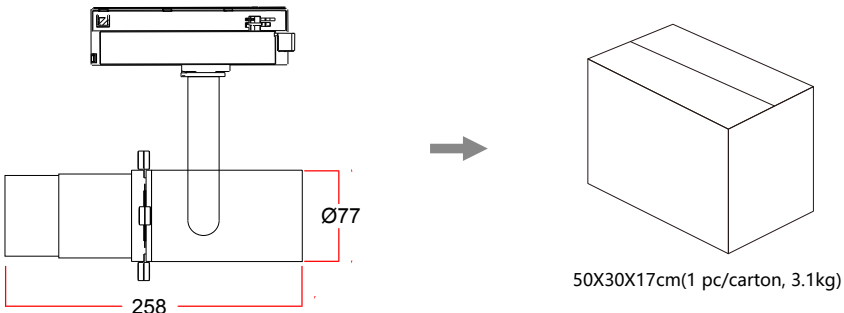

Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

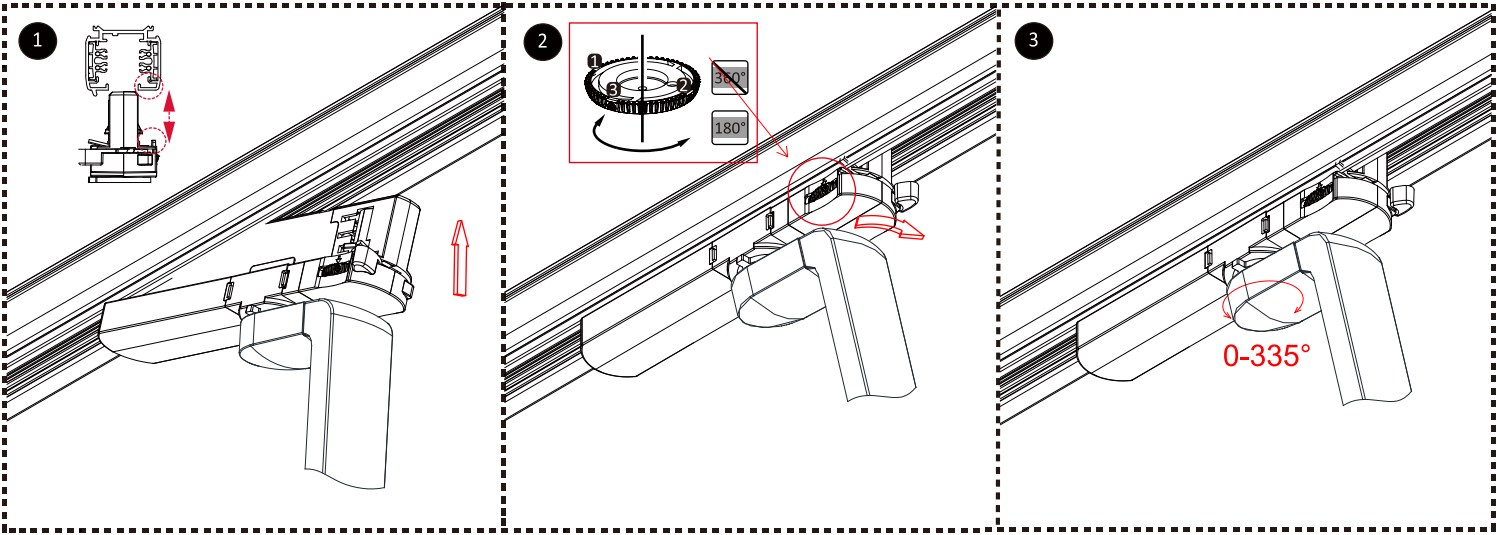

Project display

Solemnly state: below are our real cases, for more information, please contact us.

