


Track light SFR series 15W GS-TL15WRC60




Exploded diagram

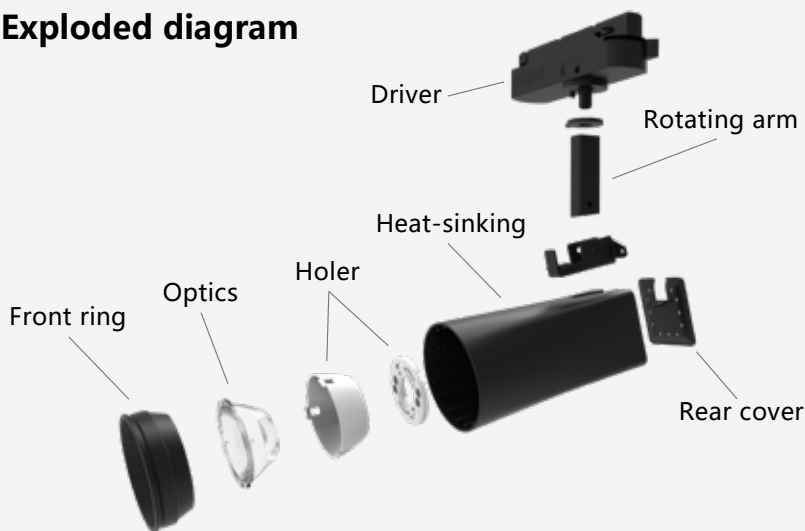


Product parameter


- LED power : 12.6W(36vDC 350mA)
- Lamp consumption : 15W
- Adapter : 3 phase(4-wire, 6-wire)
- Input voltage : 200-240vAC
- UGR : (Lens 10-15)(Reflector 13-19)
- Size : φ60*L115mm
- Material : Aluminum
- Life span : 50,000 hrs
- Warranty : 5 years
- Beam angle : (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)

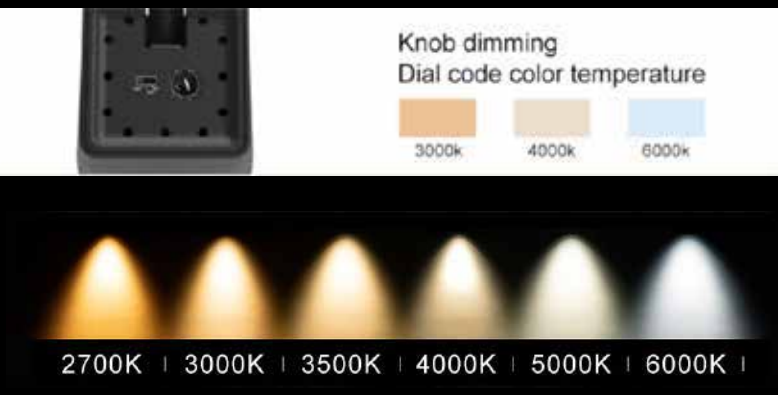


Dimmable

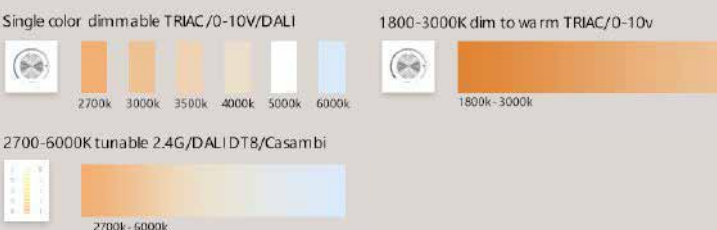

Lens

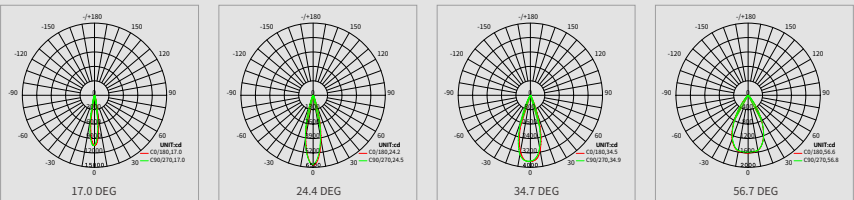


Reflector

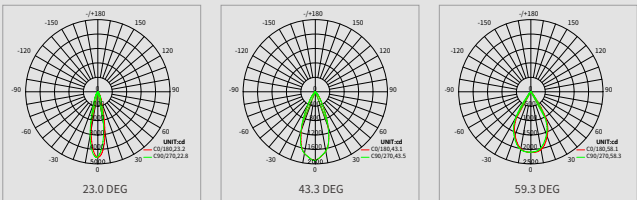


Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL15WRC60B	Bridgelux V6HD	2700K-7000K single color (standard in stock: CRI90 3000K or 4000K)	1400-1600lm	1300-1400lm	1100-1200lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL15WRC60H	GOSUN 1204H		no	1600-1800lm	no	
GS-TL15WRC60C	CITIZEN 1203		1400-1600lm	1300-1400lm	1100-1200lm	
GS-TL15WRC60TP	TYANSHINE	3000K/4500K/6000K	no	1000-1300lm	no	
GS-TL15WRC60TC		2700K~5700K tunable				

Packing

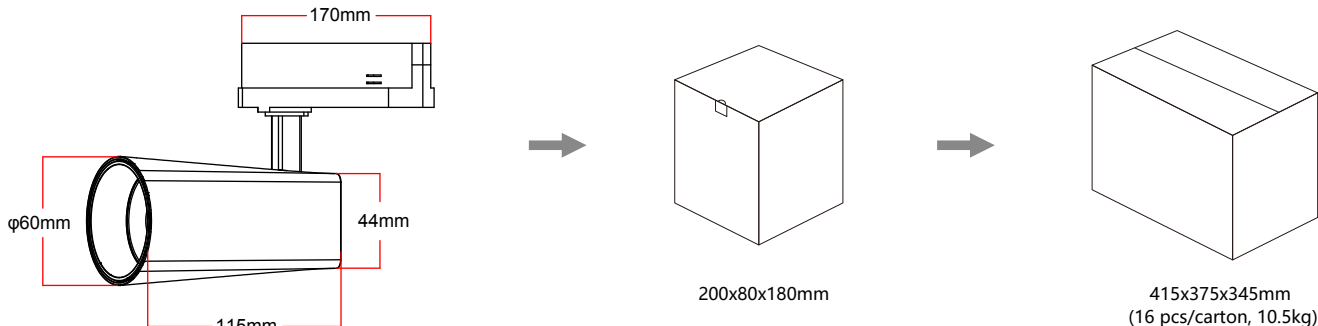

Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

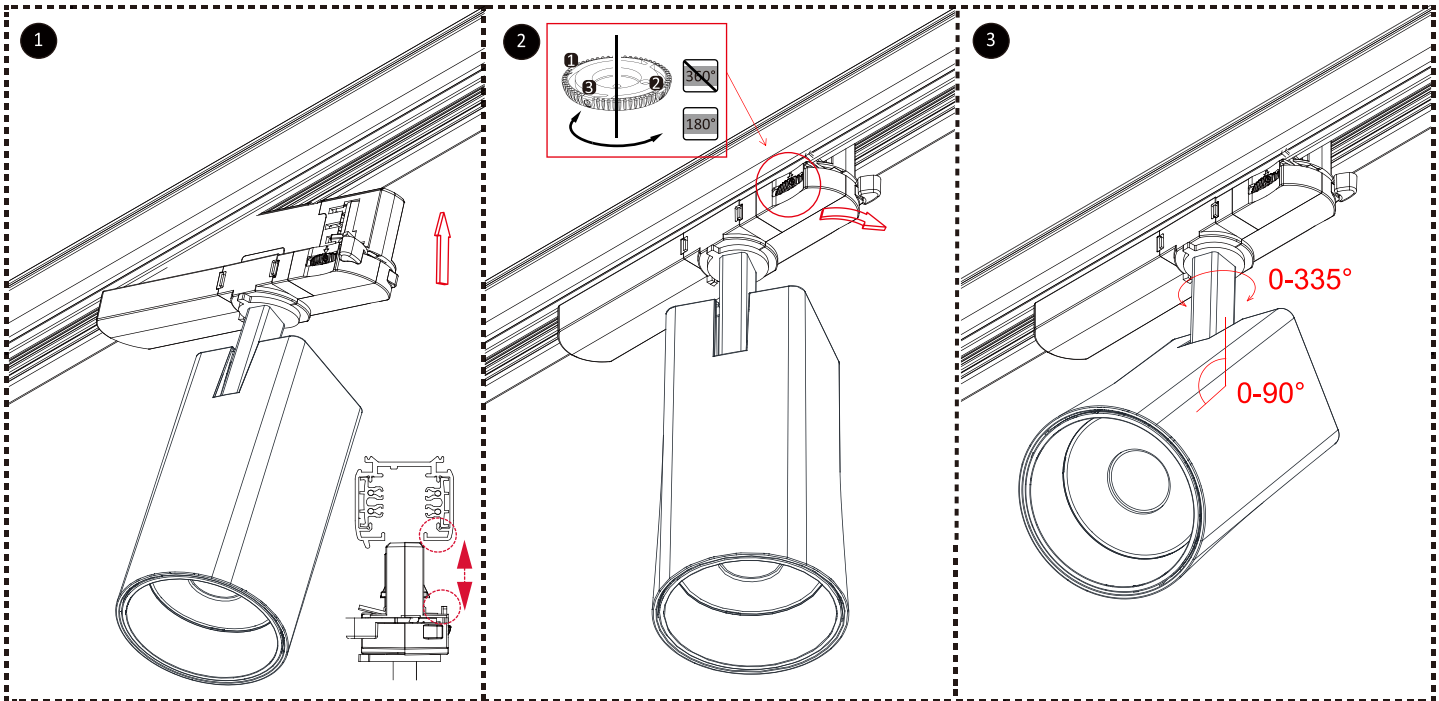

1. Make the power adaptor set to OFF, Embed the track light on the track rails.
2. Turn the handle 90° degrees according to the direction as shown in the up picture, make sure the adaptor be locked in the track rails.
3. Finish installing.

Project display

Solemnly state: below are our real cases, for more information, please contact us.

