

# Track light SFE series 32W GS-TL32WEC80










## Product parameter

|                  |                                                    |
|------------------|----------------------------------------------------|
| LED power        | : 28.8W( 36vDC 800mA)                              |
| Lamp consumption | : 32W                                              |
| Adapter          | : 3 phase(4-wire, 6-wire)                          |
| Input voltage    | : 200-240vAC                                       |
| UGR              | : (Lens 12-15 )( Reflector 15-19)                  |
| Size             | : φ80*L145mm                                       |
| Life span        | : 50,000 hrs                                       |
| Warranty         | : 5 years                                          |
| Beam angle       | : (Lens15°/24°/36°/60° )( Reflector: 30°/40°/60° ) |



## Dimmable



|                                        |       |       |                                    |       |
|----------------------------------------|-------|-------|------------------------------------|-------|
| Single color dimmable TRIAC/0-10V/DALI |       |       | 1800-3000K dim to warm TRIAC/0-10v |       |
|                                        |       |       |                                    |       |
|                                        | 2700k | 3000k | 3500k                              | 4000k |
|                                        |       |       |                                    |       |
|                                        | 5000k | 6000k | 1800k-3000k                        |       |




## Datasheet

| Part No.       | COB brand      | CCT                         | Output      |             |             | Beam angle                                              |
|----------------|----------------|-----------------------------|-------------|-------------|-------------|---------------------------------------------------------|
|                |                |                             | CRI80       | CRI90       | CRI96       |                                                         |
| GS-TL32WEC80B  | Bridgelux V13C | 2700K-7000K<br>single color | 3300-3600lm | 3000-3300lm | 2800-3100lm | Reflector<br>30°/40°/60°<br><br>Lens<br>15°/24°/36°/60° |
| GS-TL32WEC80H  | GOSUN 1208H    |                             | no          | 3600-3900lm | no          |                                                         |
| GS-TL32WEC80C  | CITIZEN 1206   |                             | 3300-3600lm | 3000-3300lm | 2800-3100lm |                                                         |
| GS-TL32WEC80TP | TYANSHINE      | 3000k/4000k/5700k           | no          | 2000-2500lm | no          |                                                         |
| GS-TL32WEC80TC |                | 2700k-5700k tunable         |             |             |             |                                                         |

## Packing

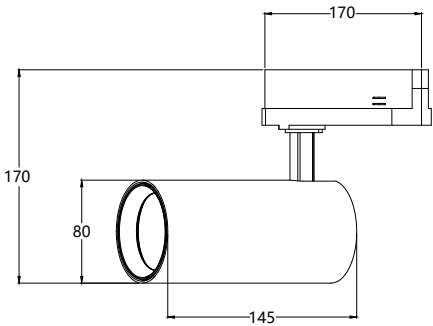


10.5x9.8x27cm




57X48X37cm(12 pcs/carton, 13.2kg)

## Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

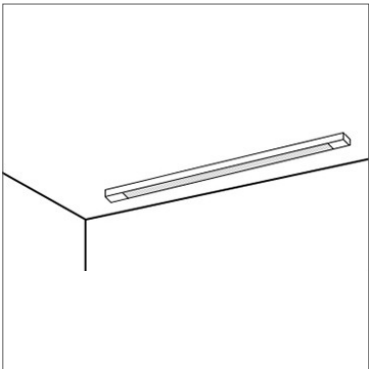


1. Fix the track rails on the suspended ceiling

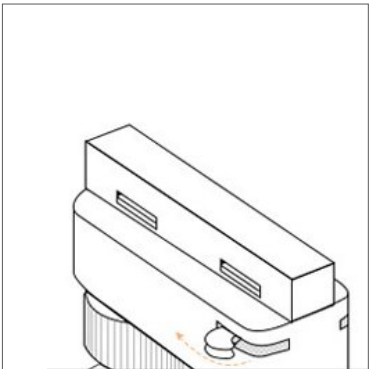

2. Make the power adaptor set to OFF

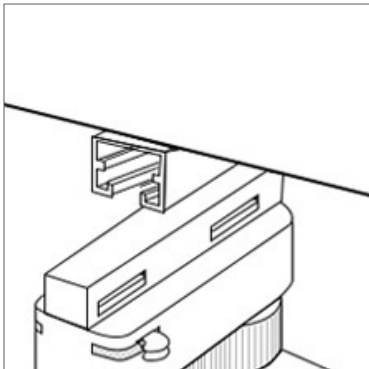

3. Embed the track light on the track rails

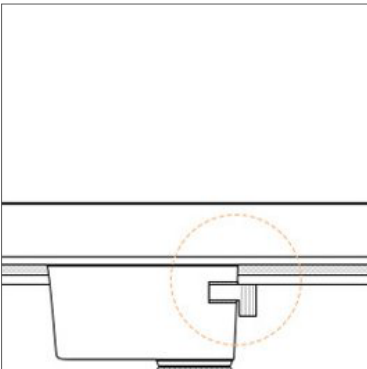

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails