

Track light SFE series 36W GS-TL36WEC88










Product parameter

LED power	: 32.4W(36vDC 900mA)
Lamp consumption	: 36W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ88*L160mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



Dimmable



Single color dimmable TRIAC/0-10V/DALI			1800-3000K dim to warm TRIAC/0-10v	
	2700k	3000k	3500k	4000k
	5000k	6000k	1800k - 3000k	




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL36WEC88B	Bridgelux V13C	2700K-7000K single color	3700-4200lm	3400-3800lm	3200-3400lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL36WEC88H	GOSUN1208H		no	4200-4600lm	no	
GS-TL36WEC88C	CITIZEN1206	3000k/4000k/5700k	3700-4200lm	3400-3800lm	3200-3400lm	
GS-TL36WEC88TP	TYANSHINE	3000k/4000k/5700k	no	2500-3200lm	no	
GS-TL36WEC88TC		2700k~5700k tunable				

Packing

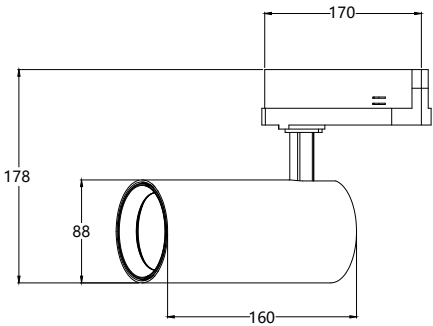


10.5x9.8x27cm




57X48X37cm(12 pcs/carton, 13.2kg)

Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

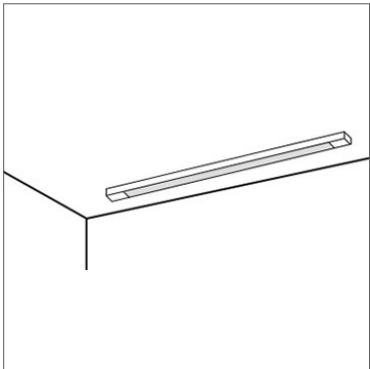


1. Fix the track rails on the suspended ceiling

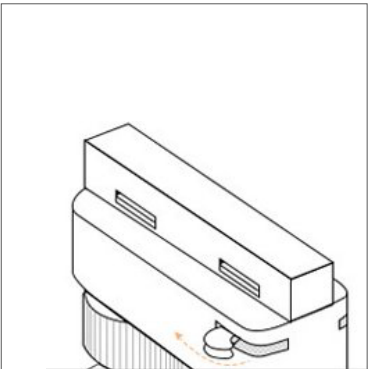

2. Make the power adaptor set to OFF

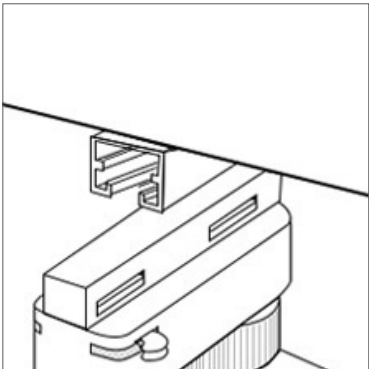

3. Embed the track light on the track rails

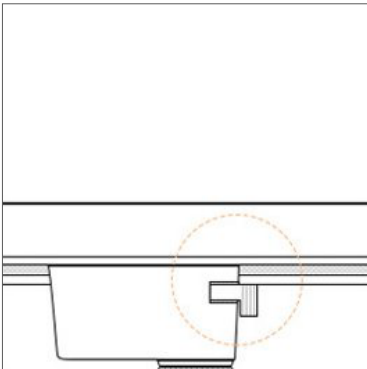

4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails