


Track light SFR series 36W GS-TL36WRC90




Exploded diagram

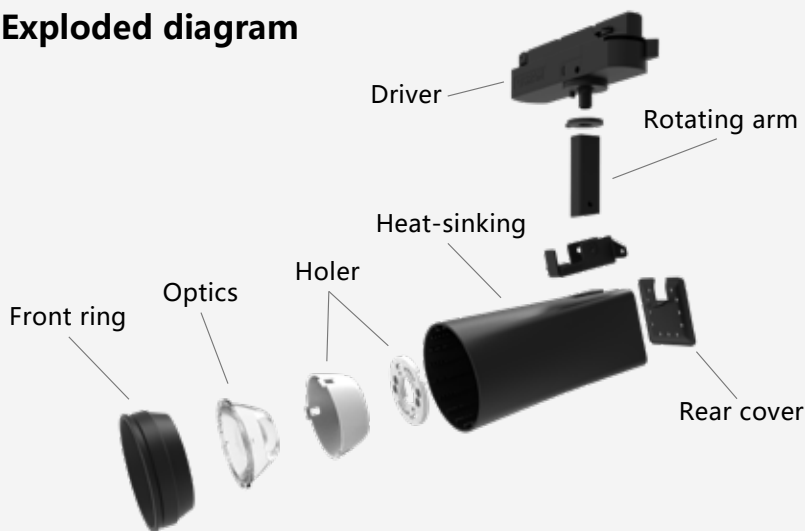


Product parameter


- LED power : 32.4W( 36vDC 900mA)
- Lamp consumption : 36W
- Adapter : 3 phase(4-wire, 6-wire)
- Input voltage : 200-240vAC
- UGR : (Lens 12-15 )( Reflector 13-19)
- Size : φ90\*L160mm
- Material : Aluminum
- Life span : 50,000 hrs
- Warranty : 5 years
- Beam angle : (Lens15°/24°/36°/60° )( Reflector: 30°/40°/60° )

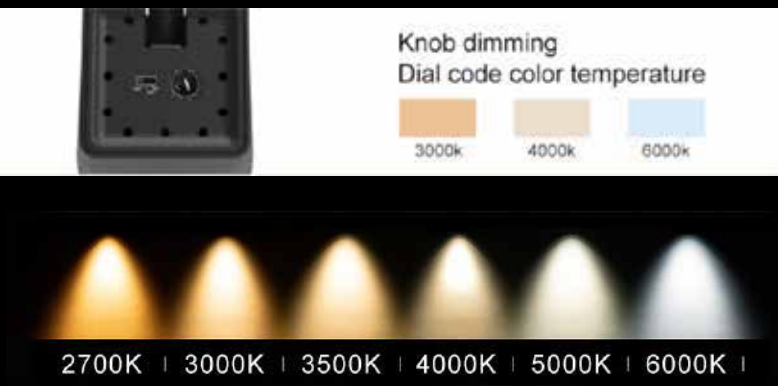


Dimmable

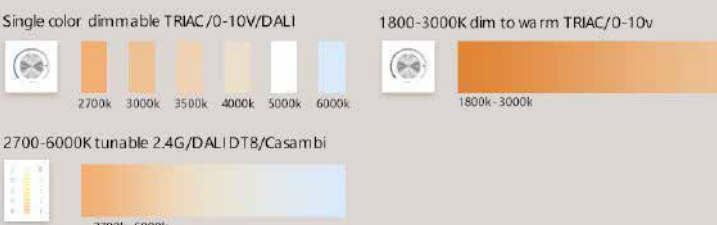

Lens

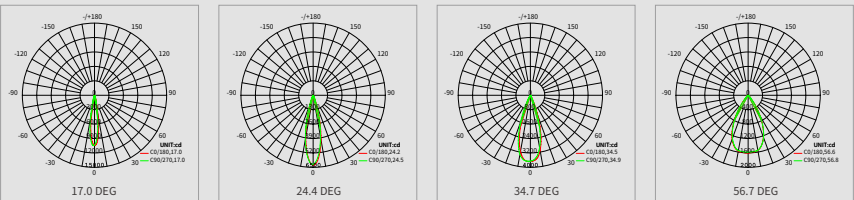


Reflector

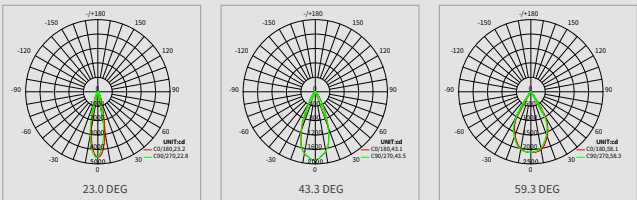


Datasheet

| Part No.       | COB brand      | CCT                                                                         | Output      |             |             | Beam angle                                              |
|----------------|----------------|-----------------------------------------------------------------------------|-------------|-------------|-------------|---------------------------------------------------------|
|                |                |                                                                             | CRI80       | CRI90       | CRI97       |                                                         |
| GS-TL36WRC90B  | Bridgelux V13C | 2700K-7000K<br>single color<br>(standard in stock:<br>CRI90 3000K or 4000K) | 3700-4200lm | 3400-3800lm | 3200-3400lm | Reflector<br>30°/40°/60°<br><br>Lens<br>15°/24°/36°/60° |
| GS-TL36WRC90H  | GOSUN1208H     |                                                                             | no          | 4200-4600lm | no          |                                                         |
| GS-TL36WRC90C  | CITIZEN1206    |                                                                             | 3700-4200lm | 3400-3800lm | 3200-3400lm |                                                         |
| GS-TL36WRC90TP | TYANSHINE      | 3000K/4000K/5700K                                                           | no          | 2500-3200lm | no          |                                                         |
| GS-TL36WRC90TC |                | 2700K~5700K<br>tunable                                                      |             |             |             |                                                         |

Packing

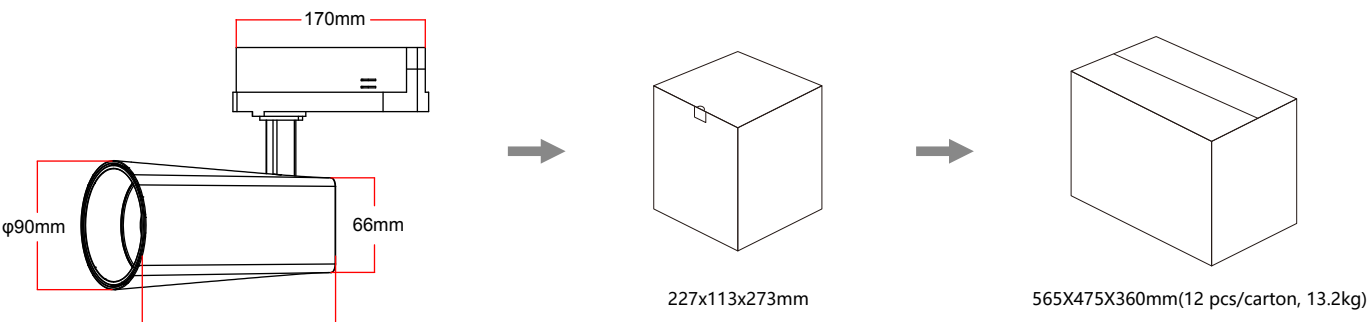

Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

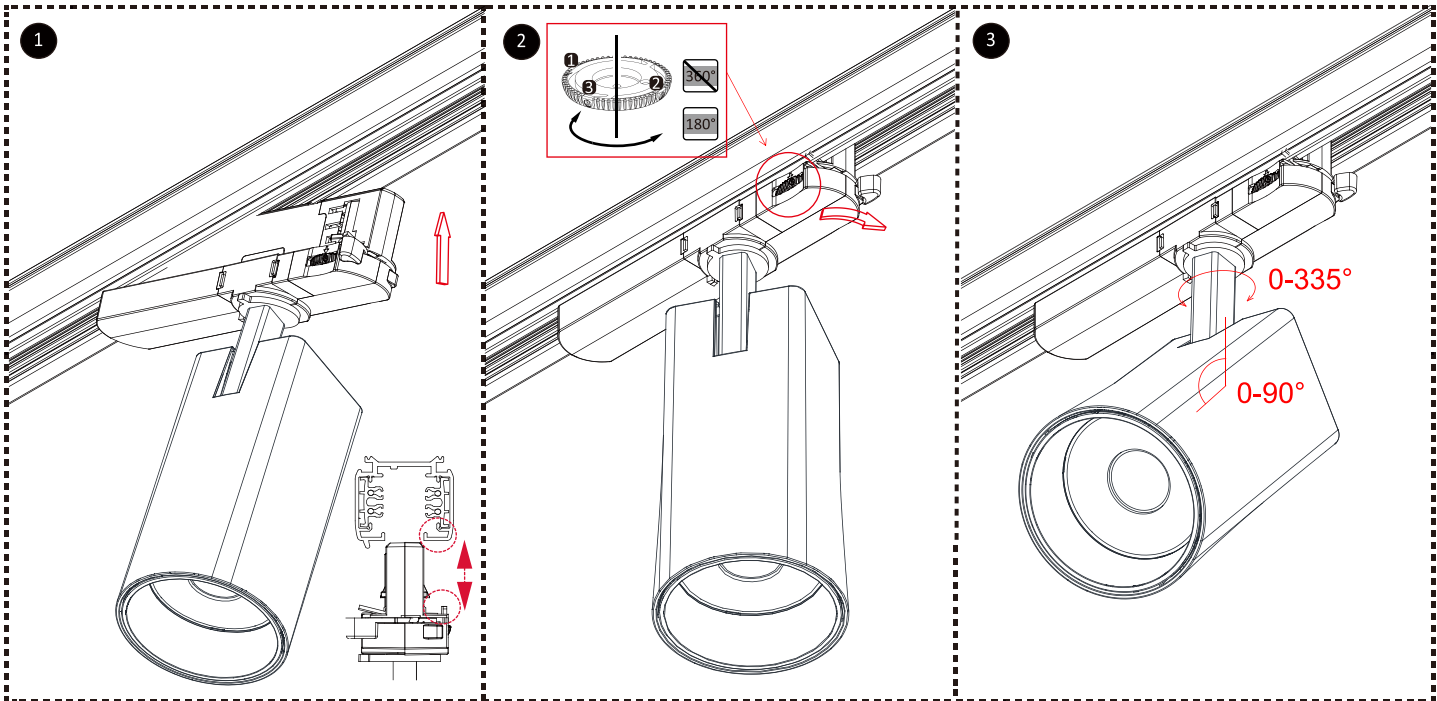

1. Make the power adaptor set to OFF, Embed the track light on the track rails.
2. Turn the handle 90° degrees according to the direction as shown in the up picture, make sure the adaptor be locked in the track rails.
3. Finish installing.

Project display

Solemnly state: below are our real cases, for more information, please contact us.

