

Track light SFZ series 36W GS-TL36WZC88



Product parameter

LED power	: 32.4W(36vDC 900mA)
Lamp consumption	: 36W
Adapter	: single phase(3-wire)
Input voltage	: 200-240vAC
UGR	: Lens 12-15
Size	: φ88*L168mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 15°-60° zoomable



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700k

3000k

3500k

4000k





5000k

6000k

1800-3000K dim to warm TRIAC/0-10v





1800k-3000k




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL36WZC88B	Bridgelux V13C	2700K-7000K single color	3400-3500lm	3200-3400lm	3000-3200lm	15°-60° zoomable
GS-TL36WZC88H	GOSUN 1208H		no	3800-4000lm	no	
GS-TL36WZC88C	CITIZEN 1206		3400-3500lm	3200-3400lm	3000-3200lm	
GS-TL36WZC88TP	TYANSHINE	3000k/4000k/5700k	2400-3200lm	2200-2900lm	no	
GS-TL36WZC88TC		2700-5700k tunable				

Packing

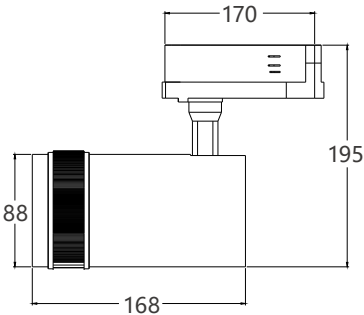


23x10.3x20.5cm




47.5X42.5X33.5cm(12 pcs/carton, 12.8kg)

Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

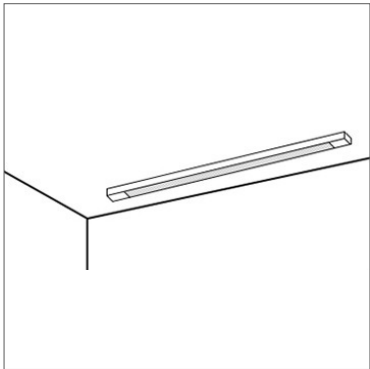


1. Fix the track rails on the suspended ceiling

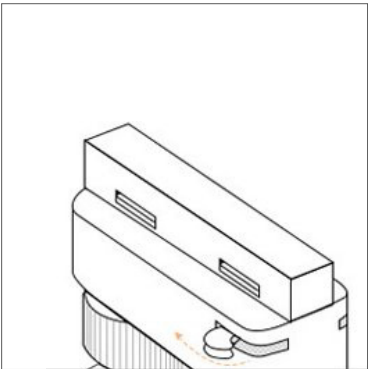

2. Make the power adaptor set to OFF

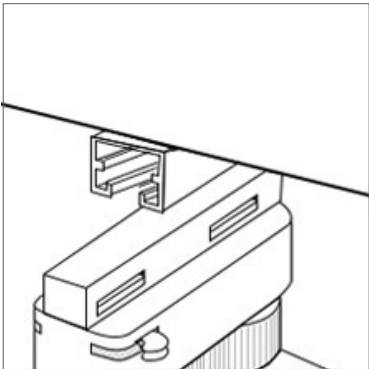

3. Embed the track light on the track rails

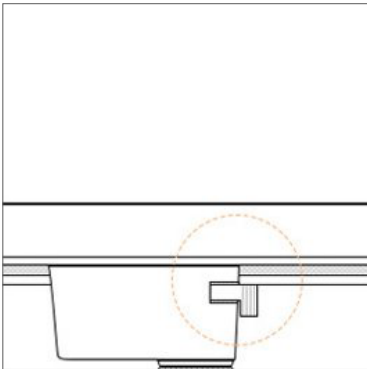

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails