

Track light SFZ series 42W GS-TL42WZC99



Product parameter

LED power	: 37.8W(36vDC 1050mA)
Lamp consumption	: 42W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: Lens 12-15
Size	: φ99*L185mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 15°-60° zoomable



Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700k

3000k

3500k

4000k

5000k

6000k





1800k-3000k

1800k-3000k

1800k-3000k

1800k-3000k



1800k-3000k




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL42WZC99B	Bridgelux V13C	2700K-7000K single color	3300-3600lm	3100-3500lm	3000-3200lm	15°-60° zoomable
GS-TL42WZC99H	GOSUN 1210H		no	4000-4200lm	no	
GS-TL42WZC99C	CITIZEN 1208		3600-4000lm	3400-3800lm	3200-3400lm	
GS-TL42WZC99TP	TYANSHINE	3000k/4000k/5700k	3000-3500lm	2500-3000lm	no	
GS-TL42WZC99TC		2700-5700k tunable				

Packing

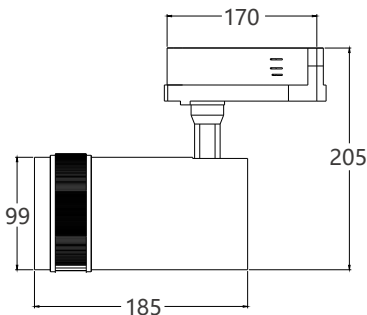


24.5x11.5x21.5cm




50.5X44.5X37cm(12 pcs/carton, 15.5kg)

Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

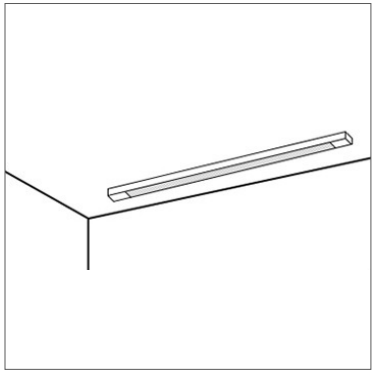


1. Fix the track rails on the suspended ceiling

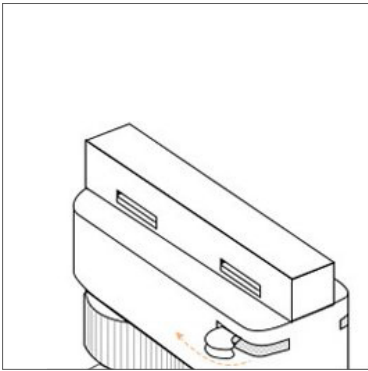

2. Make the power adaptor set to OFF

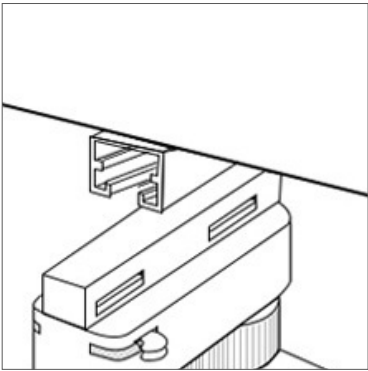

3. Embed the track light on the track rails

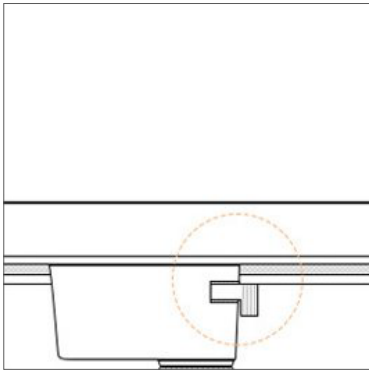

4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails