


FLOOD LIGHT SERIES

SL1136






Product Specification

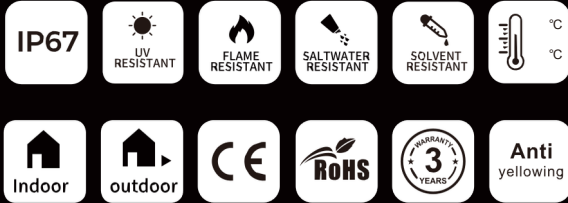

Flood Light Series

SL1136F


Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	

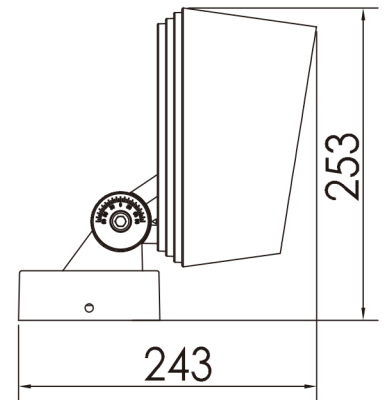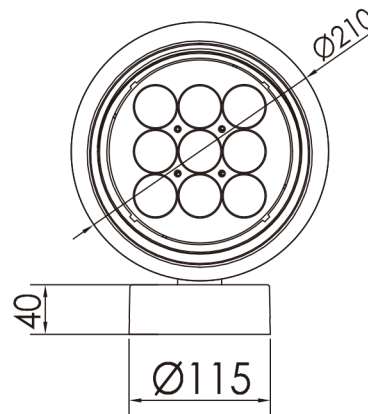

SL1136FS




SL1136U

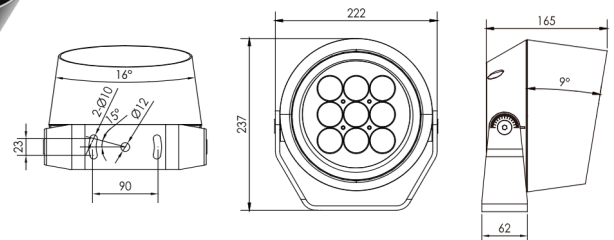





SL1136FZ

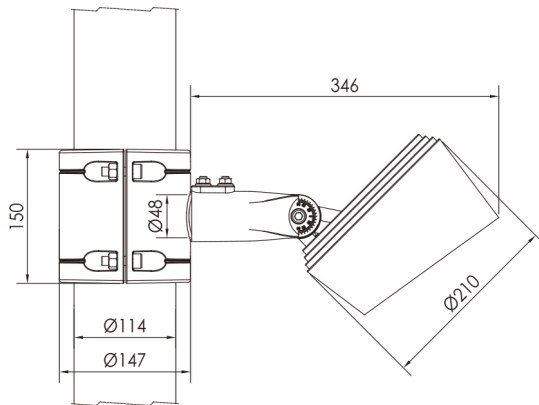


SL1136FM

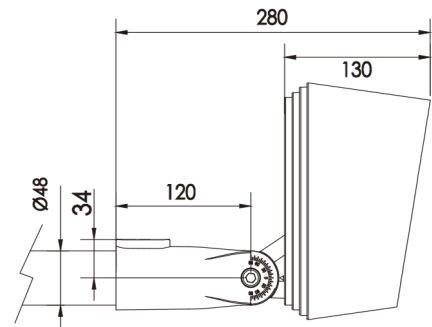

SL1136FL

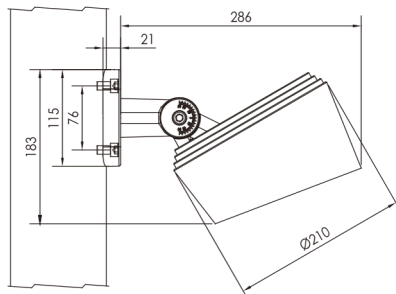

SL1136FH

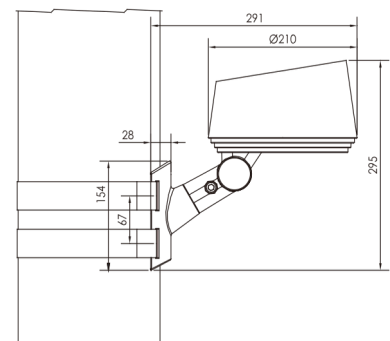

AVL Dia of pole(67-325)mmT>4







AVL Dia of pole(168-268)mm

Product Specification

Product Code	SL 1136FM-9	SL 1136FE-9	SL 1136FD-9	SL 1136FN-9
Led Brand	CREE/OSRAM	CREE/XPL	CREEXP-G3	RGBWCLA
Led Quantity	9pcs	9pcs	9pcs	9pcs
Rated Power	45W	45W	45W	60W
Input Voltage	AC100-264V	AC100-264V	AC100-264V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	RGB/Single	Single	Single	RGBWCLA
Beam Rangle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 15x60°
Control Mode	CC/DMX512/R DM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
Life	80000H	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~5o'C	-25'C~5o'C	-25'C~5o'C	-25'C~5o'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In series(max)	30pcs	30pcs	37pcs	3/20pcs

Product Code	SL 1136FF-9	SL 1136FC-27	SL 1136FM-3	SL 1136FF-3
Led Brand	CREE/RGBW 4in 1	CREE/XP-E2	CREE/OSRAM	CREE RGBW 4 in 1
Led Quantity	9pcs	27pcs	3pcs	3pcs
Rated Power	60W	60W	30W	40W
Input Voltage	DC36V/AC100-305V	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	RGBW	Single/RGB/RGB W	Single	RGBW
Beam Rangle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10X60°	1.5°	4°
Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	DMX512/RDM
Life	80000H	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~5o'C	-25'C~5o'C	-25'C~5o'C	-25'C~5o'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In series(max)	3/20pcs	3/20pcs	42pcs	40pcs

Distribution Curve Flux(SBC Case)

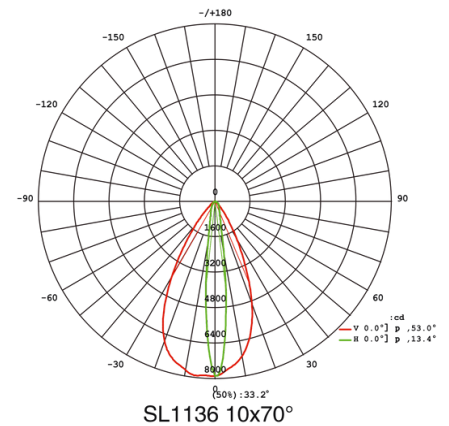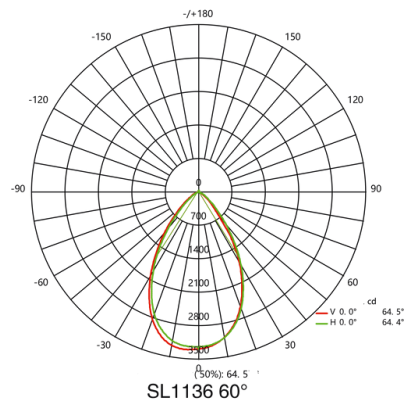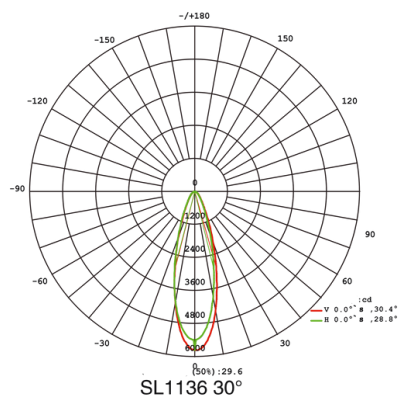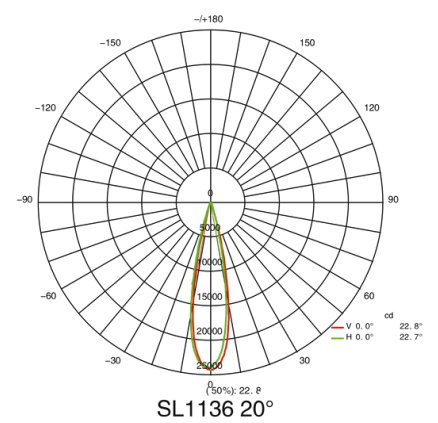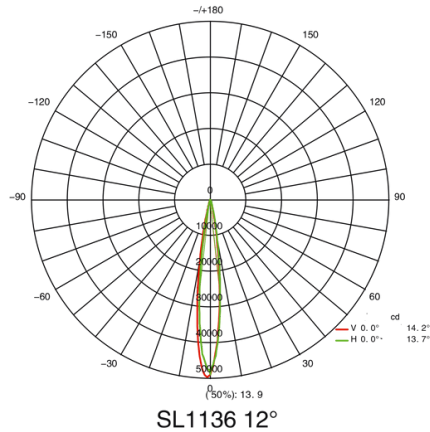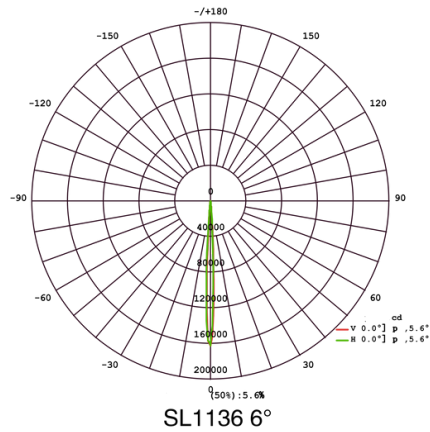

SL1130/SL1131/SL1132/SL1135 /SL1136 /SL1137/SL1139

