


FLOOD LIGHT SERIES

SL1135



Product Specification

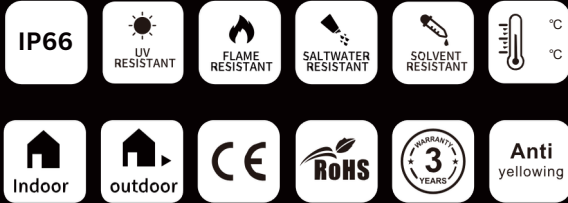







Flood Light Series

SL1135F

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	




SL1135U







SL1135OZ

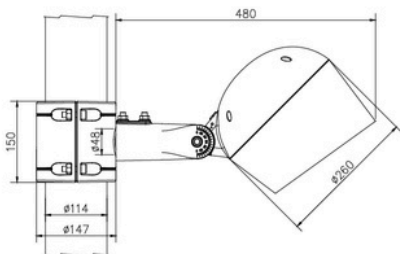


SL1135OM




SL1135FZ

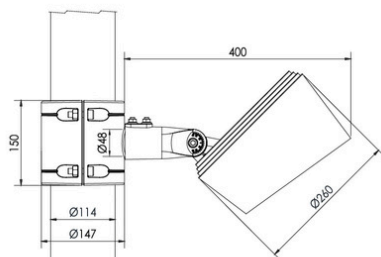

SL1135FM




SL1135FL



AVL Dia of pole(67–325)mm $T \geq 4$



SL1135FH



AVL Dia of pole(168–268)mm

Product Introduction

1. Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2. With multiway rotate function of round support or “U” support available to meet the various occasions demands for outdoors projects.
3. Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction
4. Adopt American CREE original LED light source, high flus output, excellent consistency of light color: Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specificaton

Product Code	SL 11350M-16	SL 11350E-16	SL 11350N-16	SL 11350F-16
Led Brand	CREE/OSRAM	CREE/XP-L/OSRAM	RGBWCLA 7in1	CREE RGBW 4in1
Led Quantity	16pcs	16pcs	16pcs	16pcs
Rated Power	100W(single)/120W(RGBW)	100W	150W	150W
Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single/RGBW	Single	RGBWCLA	RGBW
Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 60° 15x60°	9° 15° 20° 30° 45° 60° 15x60°
Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
Life	80000H	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series	12pcs	10pcs	8pcs	1/8pcs

Product Code	SL 11350C-48	SL 11350-C100	SL 11350R-16	
Led Brand	CREE/XP-E2	CREE/COB	LUXEON 7070	
Led Quantity	48pcs	1Pcs	16Pcs	
Rated Power	100W(single)/150W(RGBW)	100W	100W	
Input Voltage	AC100-305V	AC100-305V	AC100-305V	
Frequency Range	50/60Hz	50/60Hz	50/60Hz	
Color	Single/RGB/RGBW	Single	Single	
Beam Angle	5° 8° 12.5° 30° 10x60°	15° 24° 36° 60°	15° Tilt.60°	
Control Mode	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	
Life	80000H	80000H	80000H	
Protection Grade	IP66	IP66	IP66	
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	
Ambient Humidity	10%-90%	10%-90%	10%-90%	
In Series	1/8pcs	10pcs	10pcs	

Product Code	SL 1135FM-16	SL 1135E-16	SL 1135FD-16	SL 1135FN-16
Led Brand	CREE/OSRAM	CREE/XP-L	CREE/XP-G3	RGBWCLA 7in1
Led Quantity	16pcs	16pcs	16pcs	16pcs
Rated Power	75W(single)/100W(RGBW)	75W	60W	100W
Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single/RGBW	Single	Single	RGBWCLA
Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 45° 15x60°
Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
Life	80000H	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series	16pcs	16pcs	20pcs	12pcs

Product Code	SL 1135FF-16	SL 1135FC-48	SL 1135FM-4	SL 1135FF-4
Led Brand	CREE/RGBW 4in 1	CREE/XP-E2	CREE/OSRAM	CREE RGBW 4in 1
Led Quantity	16pcs	48pcs	4pcs	4pcs
Rated Power	100W	100W	40W	60W
Input Voltage	DC36V/ AC100-305V	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	RGBW	Single/RGB/RGBW	Single	RGBW
Beam Angle	9° 15° 20° 30° 45° 15x60°	5° 8° 12.5° 30° 10x60°	1.5°	4°
Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	DMX512/RDM
Life	80000H	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series	2/12(pcs)	2/12(pcs)	30pcs	30pcs