FLOOD LIGHT SERIES

SL1139

IP66 | UV RESISTANT | FLAME RESISTANT | SALTWATER RESISTANT | SOLVENT RESISTANT | °C °C

Indoor | outdoor | CE | RoHS | WARRANTY 3 YEARS | Anti yellowing

Product Specification

Flood Light Series
SL1139F

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	







SL1139FS



SL1139U







StarFlex Pty LTD

TEL: 1800862100

E-mail: sales @starflex.com.au

Add: 470 St Kilda Rd Melbourne 3004 Victoria Australia

Product Introduction

1. Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2. With multiway rotate function of round support or “U” support available to meet the various occasions demands for outdoors projects.
3. Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction
4. Adopt American CREE original LED light source, high flus output, excellent consistency of light color: Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specification

Product Code	SL 1139OM-4	SL 1139OE-4	SL 1139OF-4	SL 1139OC-8
Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4in1	CREE XP-G3
Led Quantity	4pcs	4pcs	4pcs	8pcs
Rated Power	30w	35W/30W	40W	30W
Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	RGBW	Single
Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 45° 10x60°
Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series(max)	60pcs	42pcs	4/42pcs	4pcs

Product Code	SL 11390-C30	SL 11390R-4		
Led Brand	CREE COB	LUXEON 7070		
Led Quantity	1pcs	4pcs		
Rated Power	30w	35W		
Input Voltage	AC100-264V	AC100-264V		
Frequency Range	50/60Hz	50/60Hz		
Color	Single	Single		
Beam Angle	15° 24° 36° 60°	30° Tilt.60°		
Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
Life	50000H	50000H		
Protection Grade	IP66	IP66		
Ambient Temperature	-25'C~50'C	-25'C~50'C		
Ambient Humidity	10%-90%	10%-90%		
In Series(max)	42pcs	42pcs		

SL1139FZ

SL1139FM

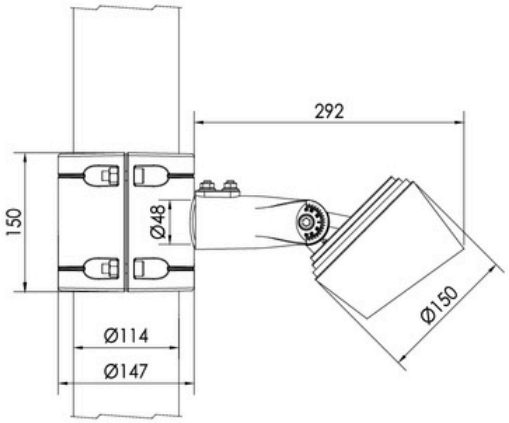

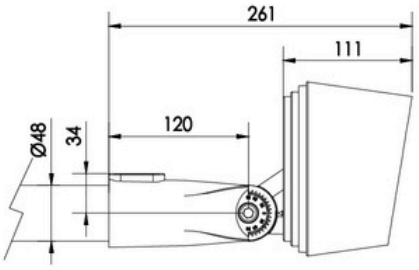

SL1139FL

SL1139FH



AVL Dia of pole(67–325)mm T≥4



AVL Dia of pole(168–268)mm

StarFlex Pty LTD

TEL: 1800862100

E-mail: sales @starflex.com.au

Add: 470 St Kilda Rd Melbourne 3004 Victoria Australia

Product Code	SL 1139FM-4	SL 1139FE-4	SL 1139FD-4	SL 1139FF-4	SL 1139FM-1
Led Brand	CREE	CREE XP-L	CREE XP-G3	CREE RGBW 4in1	CREE/OSRAM
Led Quantity	4pcs	4pcs	4pcs	4pcs	1pcs
Rated Power	20w	20w	15W	20w	10w
Input Voltage	AC100-264V	AC100-264V	AC100-264V	DC24V	AC100-264V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	Single	RGBW	Single
Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	1.5°
Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
Life	50000H	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%	10% ~ 90%
In Series(max)	120pcs	60pcs	60pcs	88pcs	7pcs

Distribution Curve Flux (SBC Case)

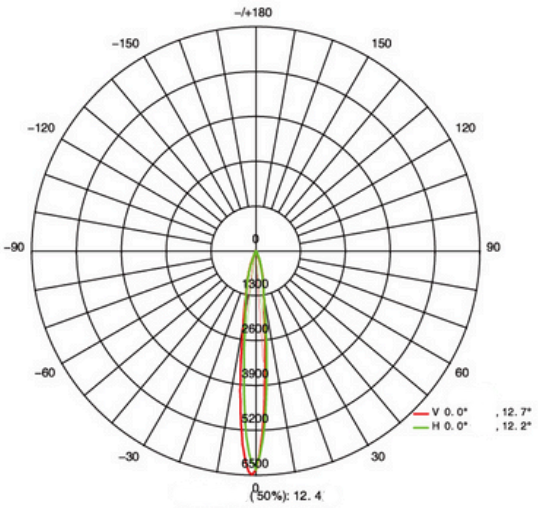

SL1139 12.5°

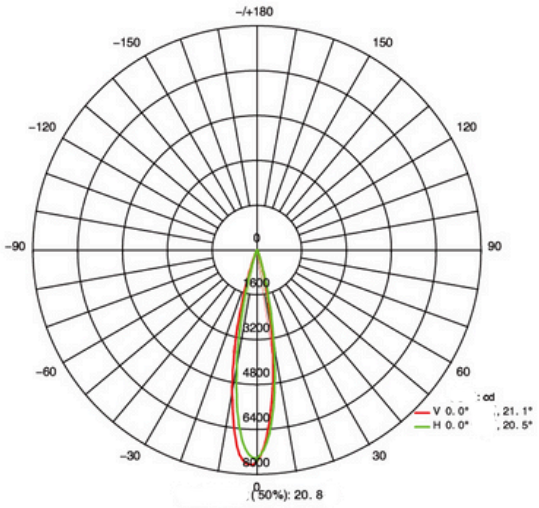

SL1139 20°

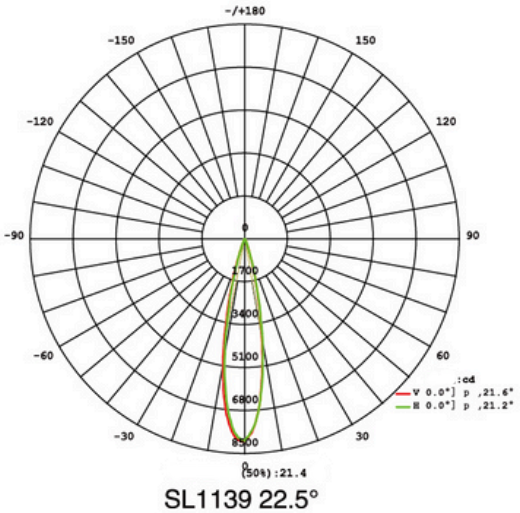

SL1139 22.5°

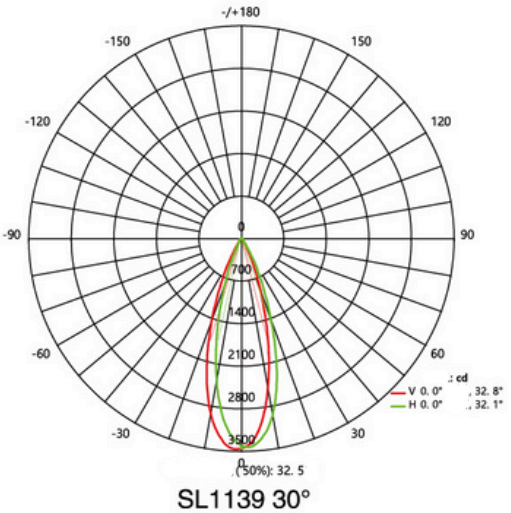

SL1139 30°

StarFlex Pty LTD

TEL: 1800862100

E-mail: sales @starflex.com.au

Add: 470 St Kilda Rd Melbourne 3004 Victoria Australia