


FLOOD LIGHT SERIES

SL1145



Product Specification

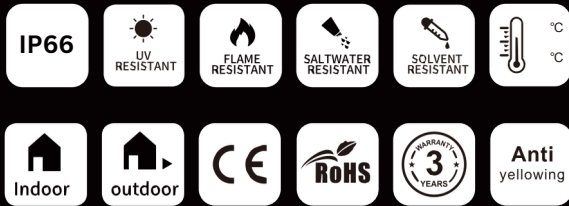




Flood Light Series

SL1145F


Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	




Integrated die casting phase change liquid cooling



SL1145U

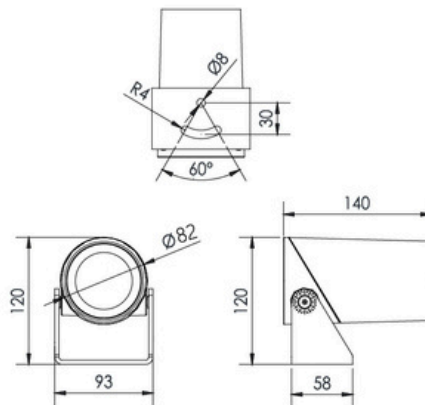

SL1145S

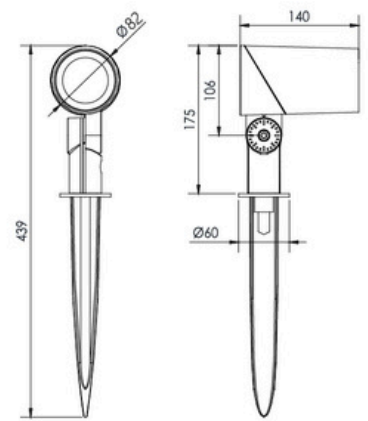



SL1145L

AVL Dia of pole(67~325)mm T≥4

Specification

Product Code	SL 1145FE-1	SL1145FF-1	SL 1145F-C16	SL 1145F-C12
Led Brand	CREE XHP35	CREE RGBW 4in1	CREE COB	CREE COB
Led Quantity	1pcs	1pcs	1pcs	1pcs
Rated Power	10W	12W/10W (OSRAM)	16W	12W
Input Voltage	AC100-264V	DC12V/DC24V	AC100-264V	AC100-264V
Frequency Range	50/60Hz	/	50/60Hz	50/60Hz
Color	Single	RGBW	Single	RGBW
Beam Angle	8° 12° 20° 30° 45° 60° 10x70°	8° 25° 10x45°	15° 24° 36° 50°	12° 24° 38°
Control Mode	CC	DMX512	CC	CC
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series(max)	130pcs	9/18pcs	100(pcs)	110(pcs)

Distribution Curve Flux (SBC Case)

