


FLOOD LIGHT SERIES

SL1150



Product Specification

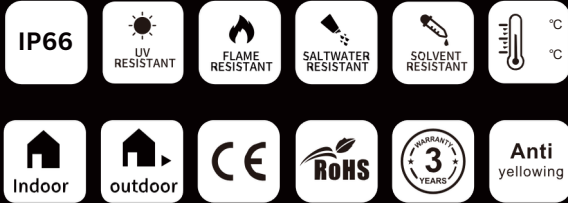

Flood Light Series

SL1150F





Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	



Integrated die casting&phase change liquid cooling




SL1150S

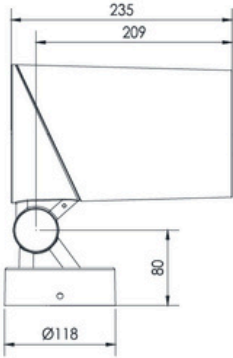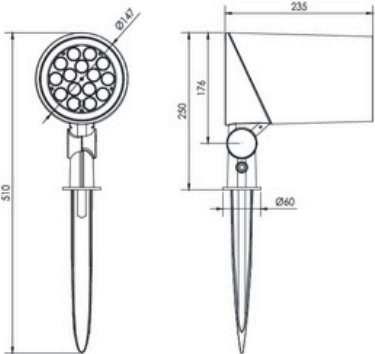





SL1150U

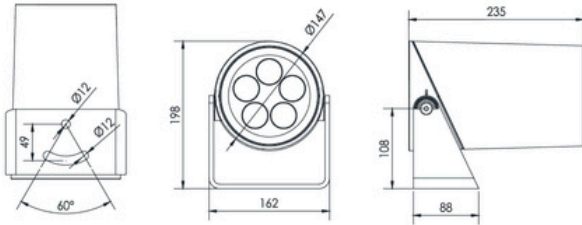


SL1150M

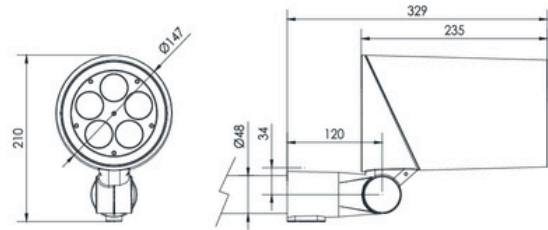


SL1150Z

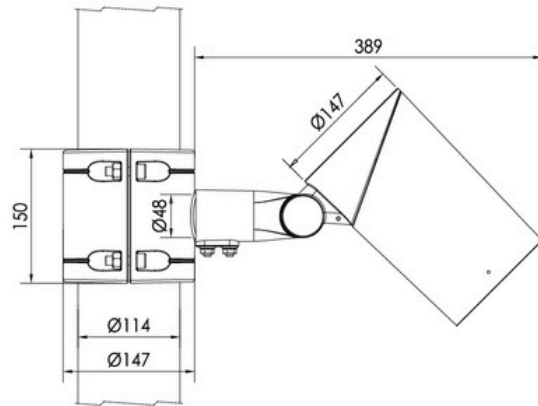

SL1150L

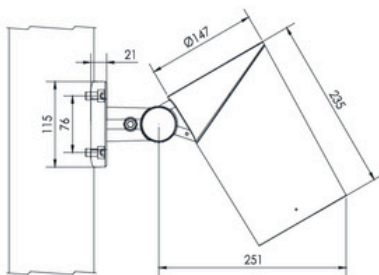

SL1150H



Product Introduction

1. Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2. With multiway rotate function of round support or “U” support available to meet the various occasions demands for outdoors projects.
3. Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction
4. Adopt American CREE original LED light source, high flus output, excellent consistency of light color: Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specification

Product Code	SL 1150FM-5	SL1150FL-5	SL 1150FD-15	SL 1150FF-5	SL 1150F-C50
Led Brand	CREE	CREE XHP35	OSRAM P9	CREE RGBW 4in1	CREE COB
Led Quantity	5pcs	5pcs	15pcs	5pcs	1pcs
Rated Power	45W	60W/45W	60W	60W/50W(OSRAM)	50W
Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC24V/AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	Single	RGBW	Single
Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 12.5° 20° 30° 10x60°	9° 15° 20° 30° 45° 15x60°	12° 24° 38°
Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V
Life	50000H	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%	10% ~ 90%
In Series(max)	28pcs	28pcs	26pcs	24/26pcs	26pcs

Distribution Curve Flux (SBC Case)

