


FLOOD LIGHT SERIES

SL1301



Product Specification

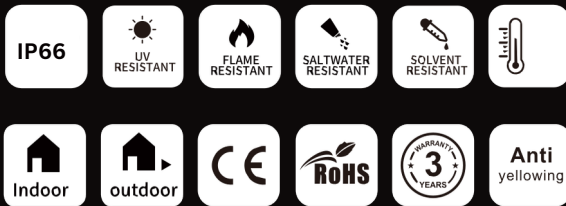


Flood Light Series

SL1301

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	



reddot winner 2021

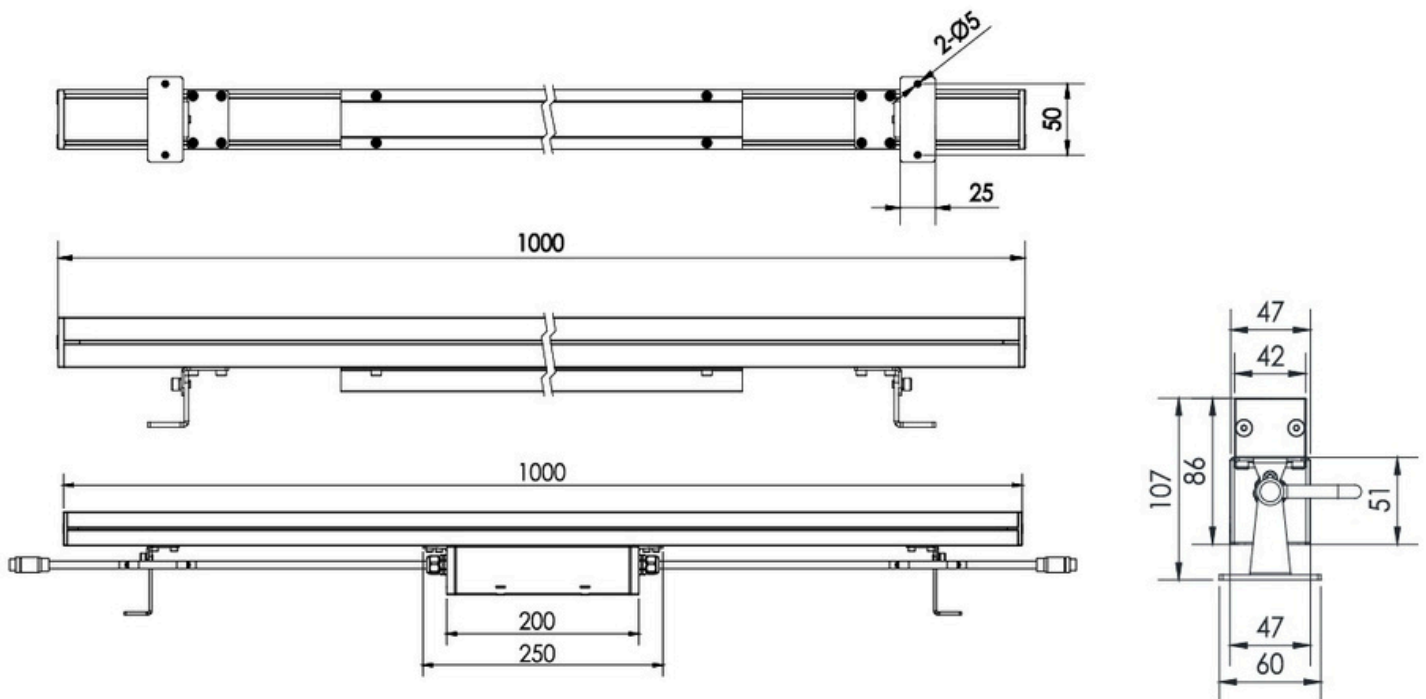

Product Introduction

1. High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2. The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3. Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft, and the color richer.
4. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specification

Product Code	SL1301P-24	SL1301H-24	SL 1301H-18	SL1301A-36	SL1301A-24	SL1301A-18
Led Brand	RGBWCL 6in1	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS
Led Quantity	24pcs	24pcs	18pcs	36pcs	24pcs	18pcs
Rated Power	48W	48W	36W	36W	24W	18W
Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
Frequency Range	/	/	/	/	/	/
Color	RGBWCL	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
Beam Angle	30° 45° 60° 30x60°	20° 45° 60° 15x60° 15x25°		8°15° 20° 30° 60° 15x30° 15x60°		
Control Mode	DMX512	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
Life	50000H	50000H	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
In series(max)	5pcs	5pcs	6pcs	6pcs	10pcs	12pcs

Product Code	SL1301H- 12(0.5)	SL1301H-9(0.5)	SL 1301H- 6(0.3)	SL1301A-18(0.5)	SL1301A-12(0.5)	SL1301A-9(0.5)
Led Brand	CREE/OSRAM RGBW 4IN1			LUMILEDS	LUMILEDS	LUMILEDS
Led Quantity	12pcs	9pcs	6pcs	18pcs	12pcs	9pcs
Rated Power	24W	18W	12W	18W	12W	9W
Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
Frequency Range	/	/	/	/	/	/
Color	RGB/Single	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
Beam Angle	20° 45° 60° 15x60°			15° 20° 30° 60° 15x30° 15x60°		
Control Mode	DMX512/CC	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
Life	50000H	50000H	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
In series(max)	10pcs	12pcs	20pcs	12pcs	20pcs	26pcs

Product Code	SL1301A- 8(0.3)				
Led Brand	LUMILEDS				
Led Quantity	8pcs				
Rated Power	8W				
Input Voltage	DC24V				
Frequency Range	/				
Color	RGB/Single				
Beam Angle	15° 20° 30° 60° 15x30° 15x60°				
Control Mode	DMX512/CC				
Life	50000H				
Protection Grade	IP66				
Ambient Temperature	-25'C~50'C				
Ambient Humidity	10%-90%				
In series(max)	30pcs				

Distribution Curve Flux (SBC Case)

