


FLOOD LIGHT SERIES

SL1307



Product Specification


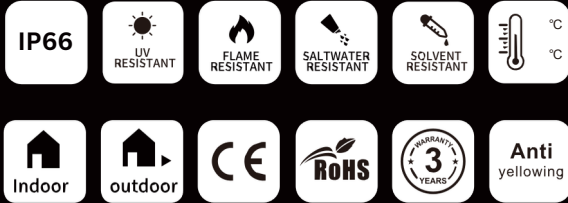


Flood Light Series SL1307

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	



red dot winner 2021

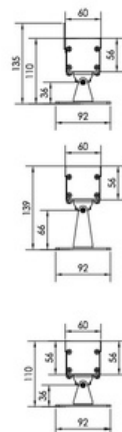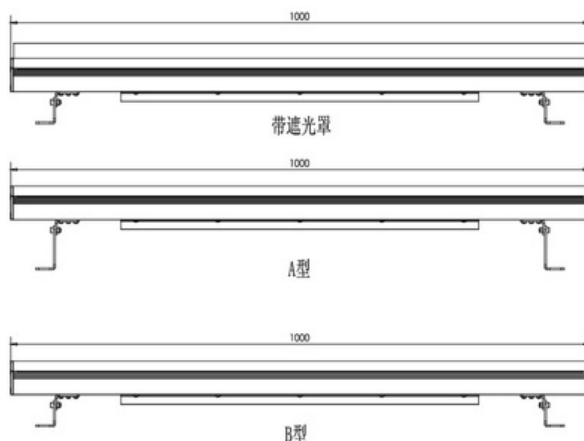

Product Introduction

1. High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2. The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3. Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft, and the color richer.
4. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specification

Product Code	SL 1307M-20	SL1307E-20	SL1307E-10(0.5m)	SL1307E-6(0.3m)
Led Brand	CREE/OSRAM	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led Quantity	20pcs	20pcs	10pcs	6pcs
Rated Power	95W	95W	48W	30W
Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	RGBW/Single	Single	Single	Single
Beam Angle	2.5°	6° 12° 20° 30° 60° 10x70° 5x60°		
Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series(max)	6pcs	6pcs	12pcs	20pcs

Product Code	SL 1307N -20	SL1307F -20	SL1307F -10(0.5m)	SL1307F -6(0.3m)
Led Brand	RGBWCLA 7in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led Quantity	20pcs	20pcs	10pcs	6pcs
Rated Power	100W	100W	50W	30W
Input Voltage	DC24V	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V
Frequency Range	/	50/60Hz	50/60Hz	50/60Hz
Color	RGBWCLA	RGBW	RGBW	RGBW
Beam Angle	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°		
Control Mode	DMX512	DMX512/RDM	DMX512/RDM	DMX512/RDM
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series(max)	40pcs	12pcs	25pcs	40pcs