



FLOOD LIGHT SERIES

SL1309

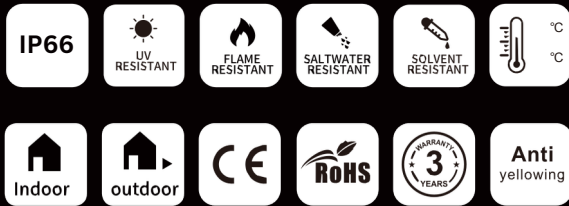


Product Specification

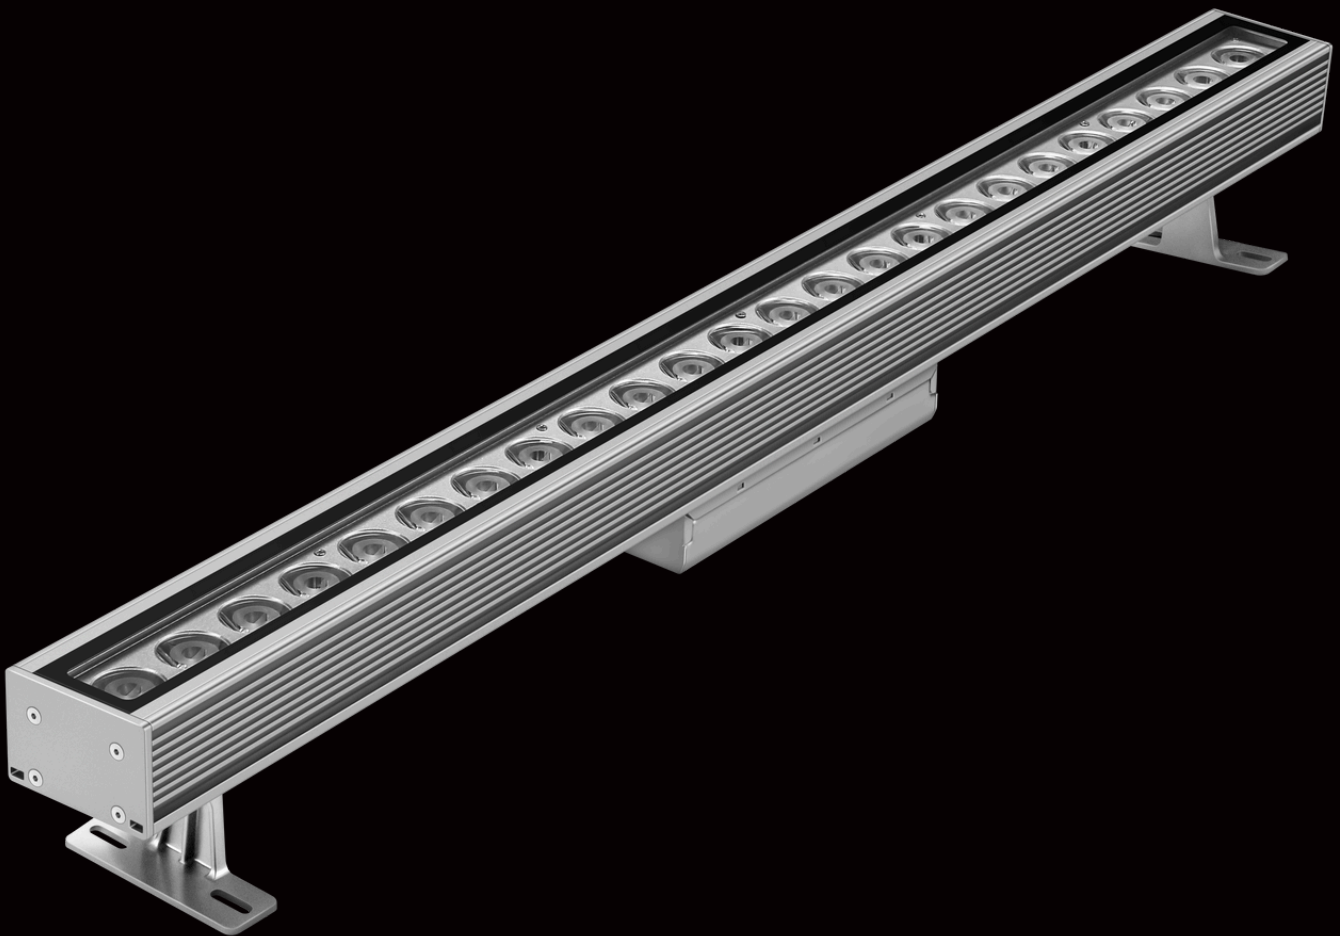

Flood Light Series SL1309

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	

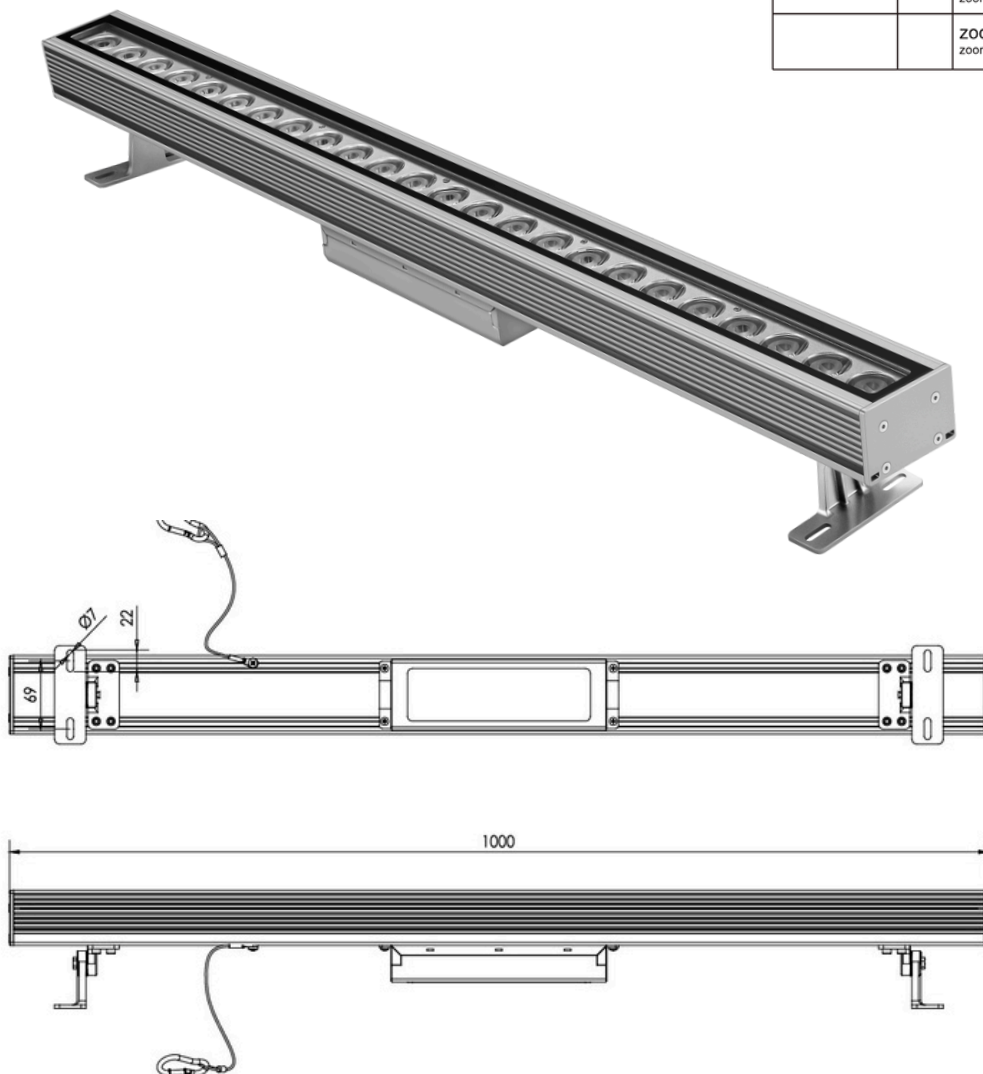

Product Introduction

1. High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2. The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3. Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft, and the color richer.
4. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specification

Product Code	SL 1309M-24	SL1309E-24	SL1309E-12(0.5m)	SL1309E-6(0.3m)
Led Brand	CREE/OSRAM	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9
Led Quantity	24pcs	24pcs	12pcs	6pcs
Rated Power	200W	200W	100W	60W
Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	RGBW/Single	Single	Single	Single
Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x70° 5x20°		
Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
Life	80000H	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series(max)	6pcs	6pcs	12pcs	20pcs

Product Code	SL 1309N-24	SL1309F-24	SL1309F -12(0.5m)
Led Brand	RGBWCLA 7in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led Quantity	24pcs	24pcs	12pcs
Rated Power	200W	200W	100W
Input Voltage	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Color	RGBWCLA	RGBW	RGBW
Beam Angle	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	
Control Mode	DMX512	DMX512/RDM	DMX512/RDM
Life	80000H	80000H	80000H
Protection Grade	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%
In Series(max)	12pcs	6pcs	12pcs

Product Code	SL 1309F-8 (0.3m)		
Led Brand	OSRAM RGBW 4in1		
Led Quantity	8pcs		
Rated Power	60W		
Input Voltage	AC100-305V		
Frequency Range	50/60Hz		
Color	RGBW		
Beam Angle	9° 15° 20° 30° 45° 15x60°		
Control Mode	DMX512/RDM		
Life	80000H		
Protection Grade	IP66		
Ambient Temperature	-25'C~50'C		
Ambient Humidity	10%-90%		
In Series(max)	20pcs		