


FLOOD LIGHT SERIES

SL1323




Product Specification

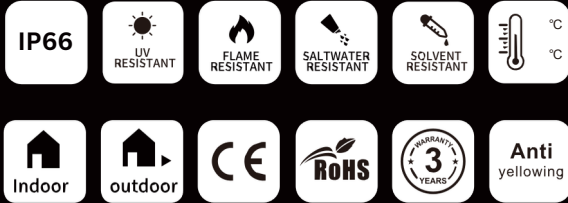

Flood Light Series SL1323

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	

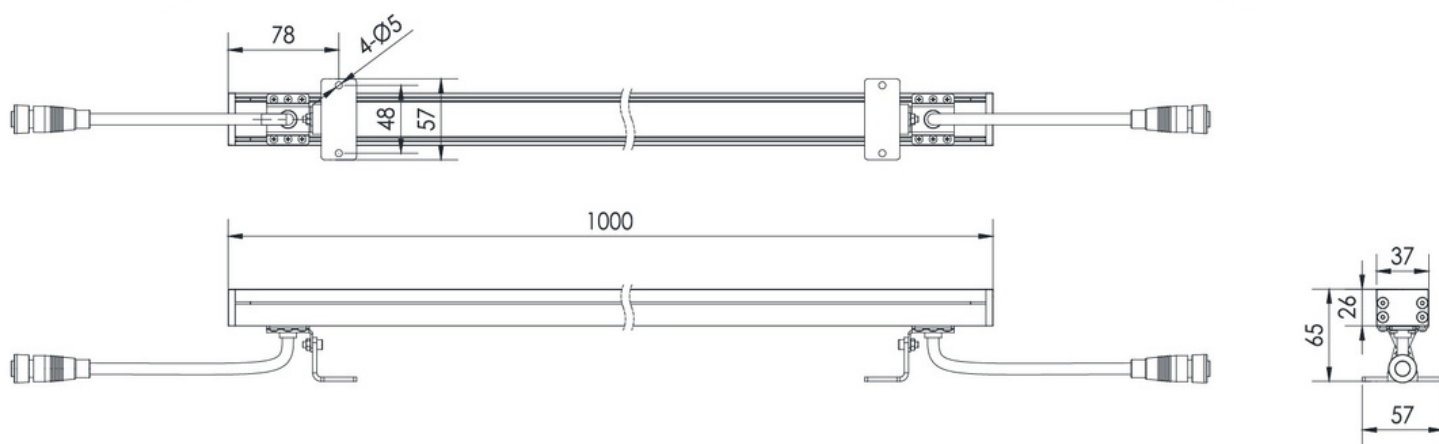

Product Introduction

1. High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2. The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3. Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft, and the color richer.
4. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Specification

Product Code	SL 1323A -24	SL1323A -18	SL1323A -12(0.5m)	SL1323A -9(0.5m)
Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM
Led Quantity	24pcs	18pcs	12pcs	9pcs
Rated Power	24W	18W	12W	9W
Input Voltage	DC24V	DC24V	DC24V	DC24V
Frequency Range	/	/	/	/
Color	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1
Beam Angle	20° 30° 45° 60° 25x45°			
Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10% ~ 90%
In Series(max)	6pcs	8pcs	12pcs	16pcs

Product Code	SL 1323A -6(0.3m)		
Led Brand	LUMILEDS/OSRAM		
Led Quantity	6pcs		
Rated Power	6W		
Input Voltage	DC24V		
Frequency Range	/		
Color	Single/RGBW 4in1		
Beam Angle	20° 30° 45° 60° 25x45°		
Control Mode	DMX512/cc		
Life	50000H		
Protection Grade	IP66		
Ambient Temperature	-25'C~50'C		
Ambient Humidity	10%-90%		
In Series(max)	24pcs		

Distribution Curve Flux (SBC Case)

