


INGROUND LIGHT SERIES

SL2109





Product Specification

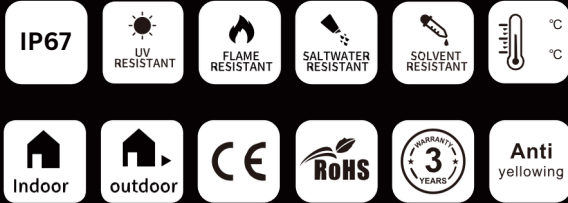

Inground Light Series SL2109C

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	

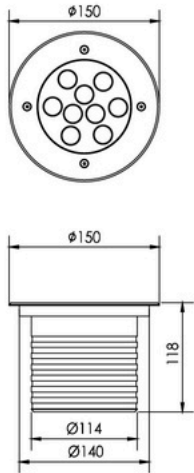

SL2109C-C12

Specification

Product Code	SL 2109CB-9	SL 2109CA-9	SL 2109C-C12
Led Brand	CREE	CREE	CREE COB
Led Quantity	9pcs	9pcs	1pcs
Rated Power	16W	11W	12W
Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Color	RGB/Single	RGB/Single	Single
Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
Control Mode	DMX512/CC	DMX512/CC	CC
Life	50000H	50000H	50000H
Protection Grade	IP67	IP67	IP67
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%
In Series(max)	9/80(pcs)	3/120(pcs)	12/110(pcs)

Distribution Curve Flux (SBC Case)

