


INGROUND LIGHT SERIES

# SL2161





## Product Specification

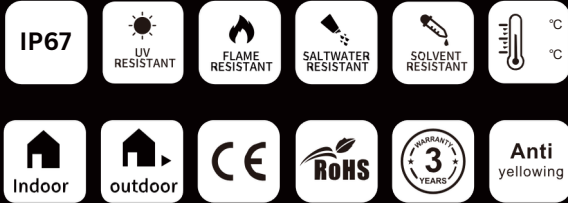

# Inground Light Series SL2161C

|                    |                                                                                    |                                               |                                                                                     |                                                   |                                                                                     |
|--------------------|------------------------------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------|
| Round-meshed grill |  | zoomneo 2.5°<br>zoomneo 2.5° The third optics |  | zoomneo 30°<br>zoomneo 30° The third optics       |  |
| Honeycomb grill    |  | zoomneo 3.5°<br>zoomneo 3.5° The third optics |  | zoomneo 40°<br>zoomneo 40° The third optics       |  |
| Honeycomb glass    |  | zoomneo 5°<br>zoomneo 5° The third optics     |  | zoomneo 1x10°<br>zoomneo 1x10° The third optics   |  |
| Anti-glare shield  |  | zoomneo 10°<br>zoomneo 10° The third optics   |  | zoomneo 1x40°<br>zoomneo 1x40° The third optics   |  |
|                    |                                                                                    | zoomneo 15°<br>zoomneo 15° The third optics   |  | zoomneo 1x60°<br>zoomneo 1x60° The third optics   |  |
|                    |                                                                                    | zoomneo 20°<br>zoomneo 20° The third optics   |  | zoomneo 10x60°<br>zoomneo 10x60° The third optics |  |

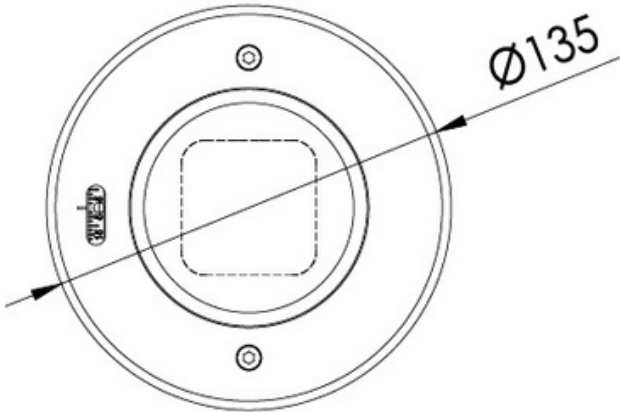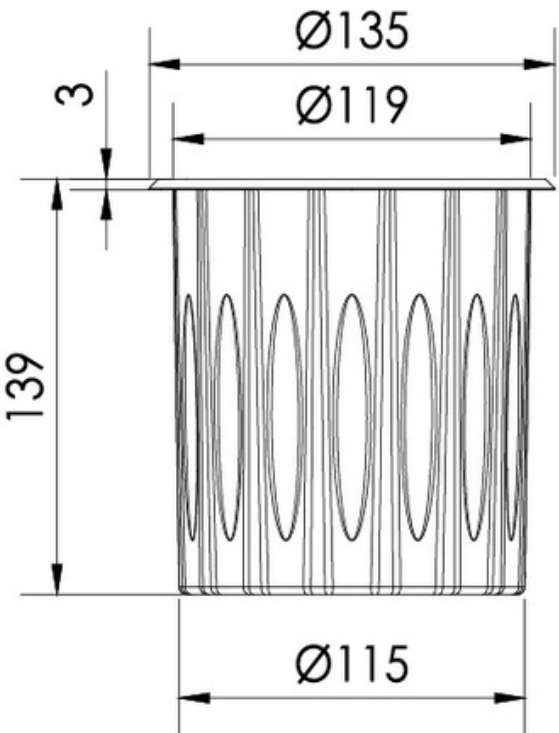

# Specification

| Product Code        | SL 2161CM-1   | SL 2161CE-1                                 | SL 2161CF-1                 | SL 2161CC-4                           | SL 2161CA-9        |
|---------------------|---------------|---------------------------------------------|-----------------------------|---------------------------------------|--------------------|
| Led Brand           | CREE/OSRAM    | CREE XP-L                                   | CREE/OSRAM XM-L 4in1        | CREE XP-G3                            | OSRAM              |
| Led Quantity        | 1pcs          | 1pcs                                        | 1pcs                        | 4pcs                                  | 1pcs               |
| Rated Power         | 10W           | 10W                                         | 10W                         | 10W                                   | 10W                |
| Input Voltage       | AC100-305V    | AC100-305V                                  | DC12V/DC24V                 | AC100-305V                            | DC24V              |
| Frequency Range     | 50/60Hz       | 50/60Hz                                     | 50/60Hz                     | 50/60Hz                               | 50/60Hz            |
| Color               | Single        | Single                                      | RGBW                        | Single                                | RGBW               |
| Beam Angle          | 2°            | 4.5° 8° 12° 20° 30°<br>45° 60° 10x70° 5x20° | 6° 8° 15° 20° 30°<br>15x60° | 8° 12.5° 20° 30° 60°<br>15x30° 10x60° | 12° 15° 24° 20x30° |
| Control Mode        | CC/DALI/O-10V | CC/DALI/O-10V                               | DMX512/RDM                  | CC/DALI/O-10V                         | DMX512             |
| Life                | 80000H        | 80000H                                      | 50000H                      | 80000H                                | 80000H             |
| Protection Grade    | IP67          | IP67                                        | IP67                        | IP67                                  | IP67               |
| Ambient Temperature | -25'C~50'C    | -25'C~50'C                                  | -25'C~50'C                  | -25'C~50'C                            | -25'C~50'C         |
| Ambient Humidity    | 10%-90%       | 10%-90%                                     | 10%-90%                     | 10%-90%                               | 10%-90%            |
| In Series(max)      | 120pcs        | 120pcs                                      | 7pcs                        | 120pcs                                | 7pcs               |