


INGROUND LIGHT SERIES

SL2166





Product Specification

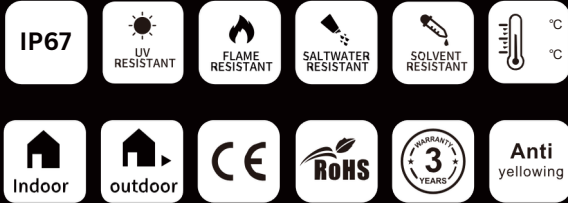

Inground Light Series SL2166C

Round-meshed grill		zoomneo 2.5° zoomneo 2.5° The third optics		zoomneo 30° zoomneo 30° The third optics	
Honeycomb grill		zoomneo 3.5° zoomneo 3.5° The third optics		zoomneo 40° zoomneo 40° The third optics	
Honeycomb glass		zoomneo 5° zoomneo 5° The third optics		zoomneo 1x10° zoomneo 1x10° The third optics	
Anti-glare shield		zoomneo 10° zoomneo 10° The third optics		zoomneo 1x40° zoomneo 1x40° The third optics	
		zoomneo 15° zoomneo 15° The third optics		zoomneo 1x60° zoomneo 1x60° The third optics	
		zoomneo 20° zoomneo 20° The third optics		zoomneo 10x60° zoomneo 10x60° The third optics	

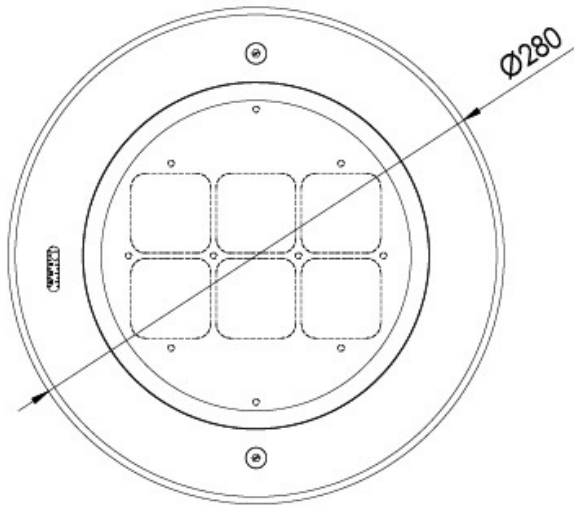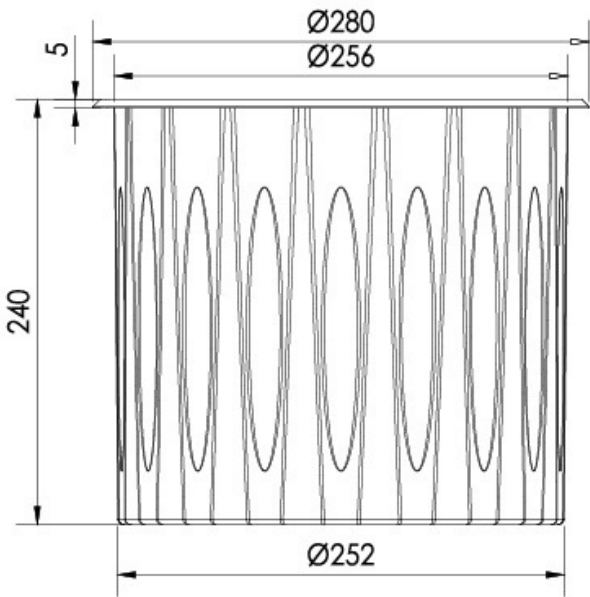

Specification

Product Code	SL 2166CM-6	SL 2166CE-6	SL 2166CF-6	SL 2166CC-24	SL 2166CA-54
Led Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
Led Quantity	6pcs	6pcs	6pcs	24pcs	54pcs
Rated Power	40W	50W	60W	50W	60W
Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	RGBW	Single	RGBW
Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC
Life	80000H	80000H	50000H	80000H	80000H
Protection Grade	IP67	IP67	IP67	IP67	IP67
Ambient Temperature	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C	-25'C~50'C
Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%
In Series(max)	20pcs	20pcs	20pcs	20pcs	20pcs

