

Track light SFE series 20W GS-TL20WEI77




Product parameter

LED power	: 18W(36vDC 500mA)
Lamp consumption	: 20W
Adapter	: Powergear 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ77*L140mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)




Dimmable

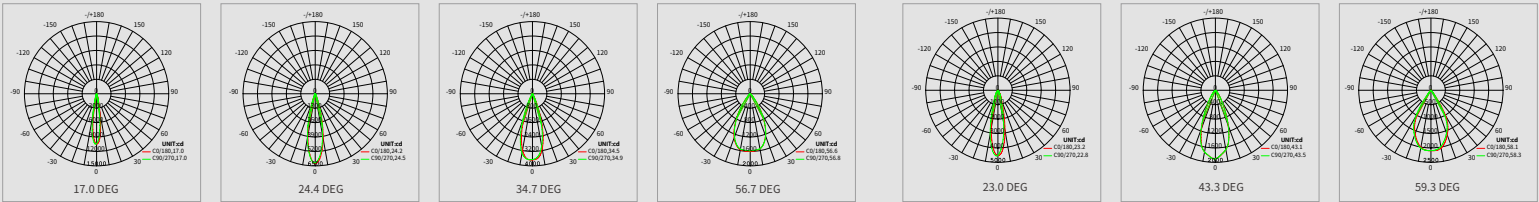

Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL20WEI77B	Bridgelux V10A	2700K-7000K single color	2300-2400lm	2000-2100lm	1800-2000lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL20WEI77S	GOSUN 1206		2300-2400lm	2000-2100lm	1800-2000lm	
GS-TL20WEI77H	GOSUN 1206H		no	2400-2600lm	no	
GS-TL20WEI77C	CITIZEN1205		2300-2400lm	2000-2100lm	1800-2000lm	
GS-TL20WEI77TP	TYANSHINE	3000k/4000k/5700k	no	1300-1600lm	no	

Packing

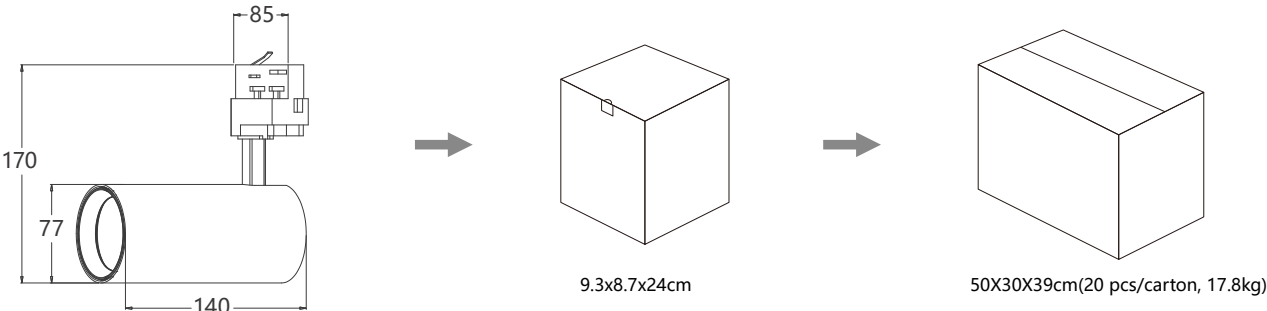

Installation Instuction

Warning: Make sure that the power on the track rail is off before installation.

1. Fix the track rails on the suspended ceiling
2. Make the power adaptor set to OFF
3. Embed the track light on the track rails
4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails