

Track light SFL series 20W GS-TL20WLO55










Product parameter

LED power	: 18W(36vDC 500mA)
Lamp consumption	: 20W
Adapter	: 3 phase(4-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ55*L150mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



Dimmable



Single color dimmable TRIAC/0-10V/DALI	1800-3000K dim to warm TRIAC/0-10v
 2700k 3000k 3500k 4000k 5000k 6000k	 1800k-3000k




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL20WLO55B	Bridgelux V10A	2700K-7000K single color	2100-2400lm	1900-2100lm	1700-2000lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL20WLO55H	GOSUN 1204H		no	2300-2600lm	no	
GS-TL20WLO55C	CITIZEN 1204		2100-2400lm	1900-2100lm	1700-2000lm	
GS-TL20WLO55TC	TYANSHINE	2700K-5700K tunable	no	1300-1600lm	no	

Packing

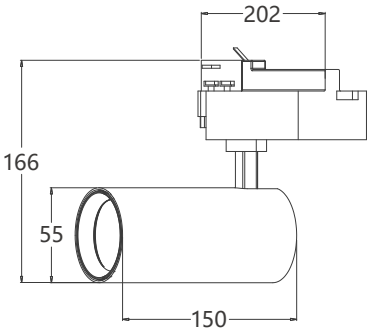


XXXXXXXcm




52x41x35cm(16 pcs/carton, 12.8kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

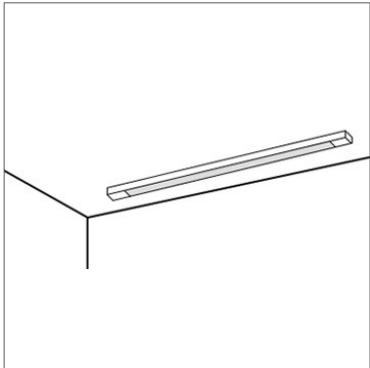


1. Fix the track rails on the suspended ceiling

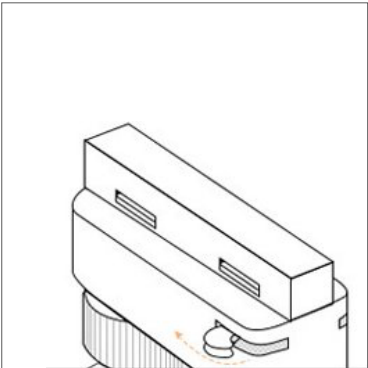

2. Make the power adaptor set to OFF

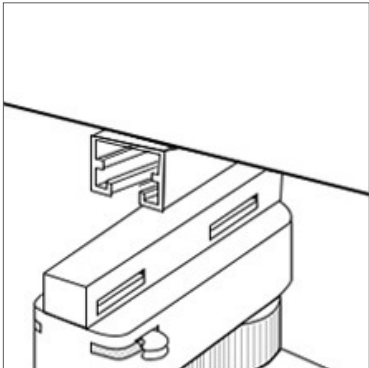

3. Embed the track light on the track rails

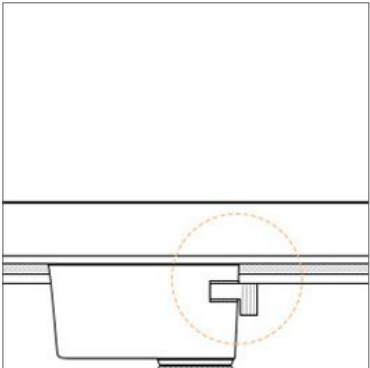

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails