

Track light SFZ series 20W GS-TL20WZI77



Product parameter





LED power	: 18W(36vDC 500mA)
Lamp consumption	: 20W
Adapter	: Powergear 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: Lens 12-15
Size	: φ77*L150mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 15°-60° zoomable



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable



Single color dimmable TRIAC/0-10V/DALI	1800-3000K dim to warm TRIAC/0-10v
 2700k 3000k 3500k 4000k 5000k 6000k	 1800k-3000k




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL20WZI77C	CITIZEN1204	2700K-7000K single color	1800-2000lm	1600-1800lm	1400-1600lm	15°-60° zoomable
GS-TL20WZI77T	TYANSHINE	3000k/4000k/5700k	no	1300-1600lm	no	

Packing




9.3x8.7x24cm




49.5x38.7x37cm(32 pcs/carton, 28kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

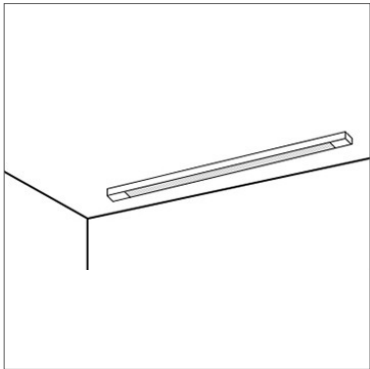


1. Fix the track rails on the suspended ceiling

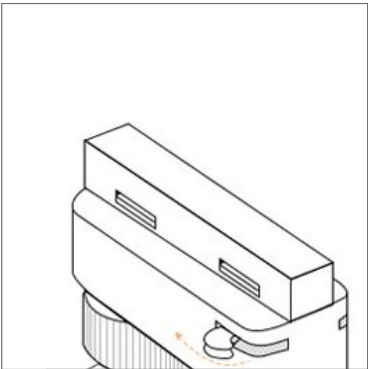

2. Make the power adaptor set to OFF

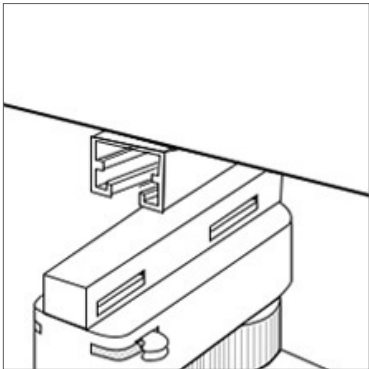

3. Embed the track light on the track rails

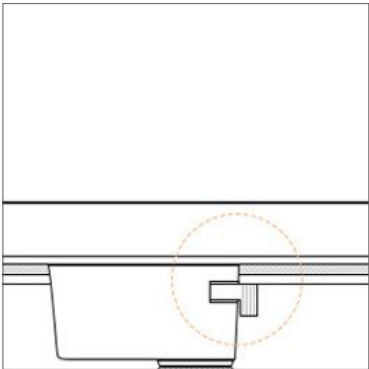

4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails