


Track light SFZ series 20W GS-TL20WZU77




Product parameter

LED power	: 18W(36vDC 500mA)
Lamp consumption	: 20W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: Lens 12-15
Size	: $\varnothing 77 \times L128 \text{mm}$
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 15°-60° zoomable

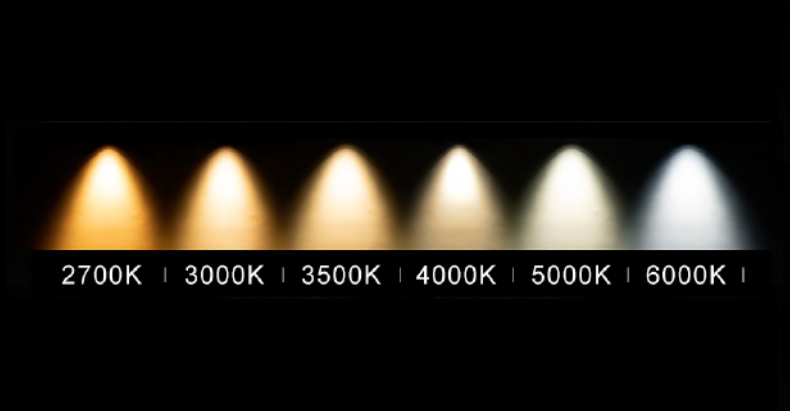

Dimmable





Single color dimmable TRIAC/0-10V/DALI



1800-3000K dim to warm TRIAC/0-10v





2700-6000K tunable 2.4G/DALI DT8/Casambi




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL20WZU77C	CITIZEN1204	2700K-7000K single color	1800-2000lm	1600-1800lm	1400-1600lm	15°-60° zoomable
GS-TL20WZU77T	TYANSHINE	3000k/4000k/5700k	no	1300-1600lm	no	

Packing




16x21.6x10cm




49.5x23x43cm(12 pcs/carton, 9kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

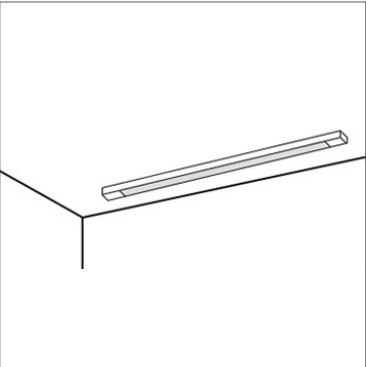


1. Fix the track rails on the suspended ceiling

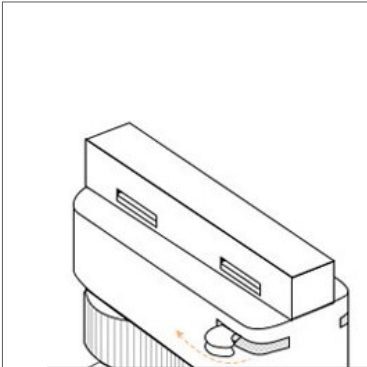

2. Make the power adaptor set to OFF

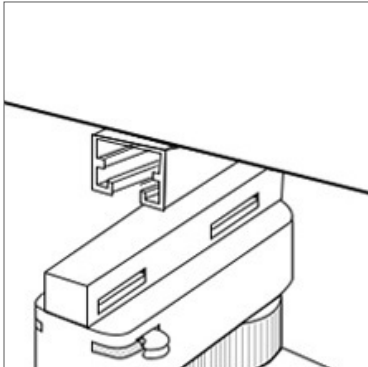

3. Embed the track light on the track rails

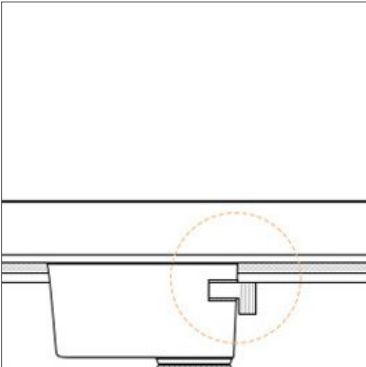

4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails