

Track light SFL series 25W GS-TL25WLI77




Product parameter

LED power	: 18W(36vDC 600mA)
Lamp consumption	: 25W
Adapter	: Powergear 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ77*L170mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)




Dimmable

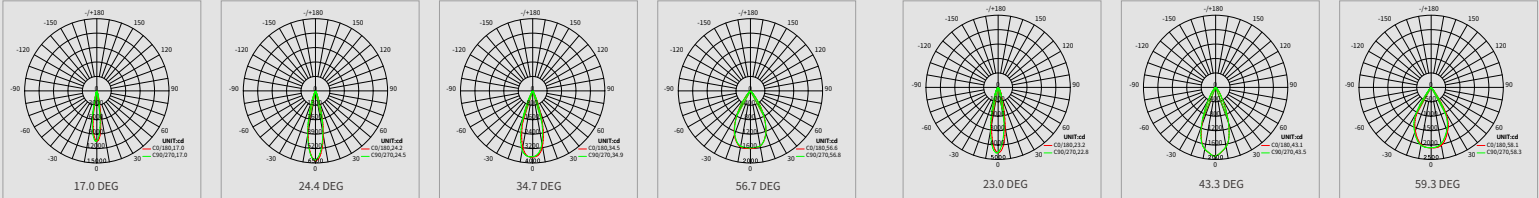

Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL25WLI77B	Bridgelux V10A	2700K-7000K single color	2500-2800lm	2300-2600lm	2100-2300lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL25WLI77H	GOSUN 1206H		no	2700-3000lm	no	
GS-TL25WLI77C	CITIZEN 1205		2500-2800lm	2300-2600lm	2100-2300lm	
GS-TL25WLI77TP	TYANSHINE	3000k/4000k/5700k	no	1700-2000lm	no	

Packing

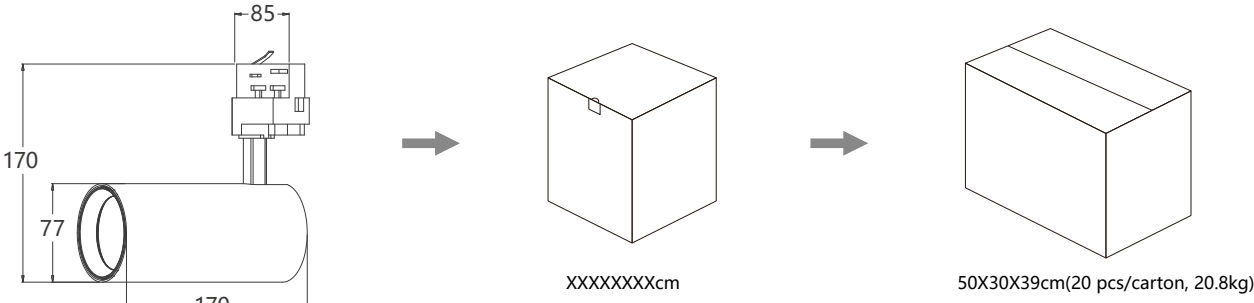

Installation Instuction

Warning: Make sure that the power on the track rail is off before installation.

1. Fix the track rails on the suspended ceiling
2. Make the power adaptor set to OFF
3. Embed the track light on the track rails
4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails