

Track light SFL series 30W GS-TL30WLC66



Product parameter








- LED power : 27W(36vDC 750mA)
- Lamp consumption : 30W
- Adapter : 3 phase(4-wire, 6-wire)
- Input voltage : 200-240vAC
- UGR : (Lens 12-15)(Reflector 15-19)
- Size : φ66*L160mm
- Life span : 50,000 hrs
- Warranty : 5 years
- Beam angle : (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable



- Single color dimmable TRIAC/0-10V/DALI
- 1800-3000K dim to wa rm TRIAC/0-10v




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL30WLC66B	Bridgelux V9HD	2700K-7000K single color	3200-3400lm	2700-3000lm	2500-2800lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL30WLC66H	GOSUN 1206H		no	3300-3600lm	no	
GS-TL30WLC66C	CITIZEN1205		3200-3400lm	2700-3000lm	2500-2800lm	
GS-TL30WLC66TP	TYANSHINE	3000k/4000k/5700k	no	2000-2600lm	no	
GS-TL30WLC66TC		2700-5700k tunable				

Packing

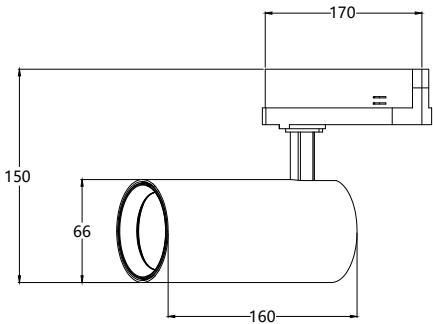


XXXXXXXcm




52x41x35cm(16 pcs/carton, 15.5kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

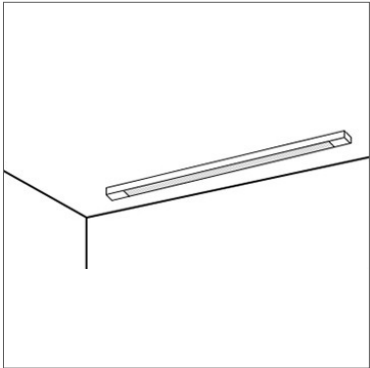


1. Fix the track rails on the suspended ceiling

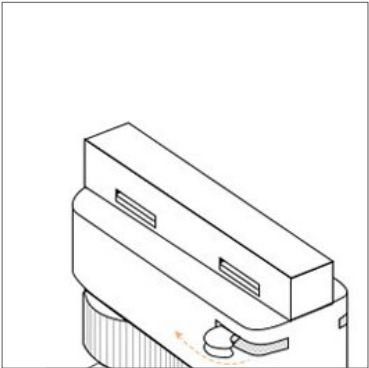

2. Make the power adaptor set to OFF

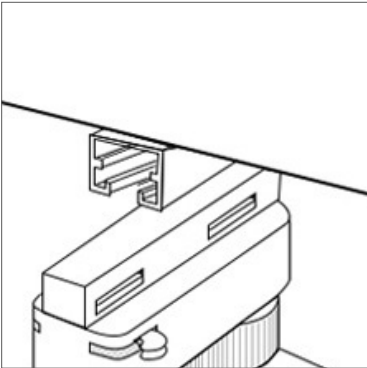

3. Embed the track light on the track rails

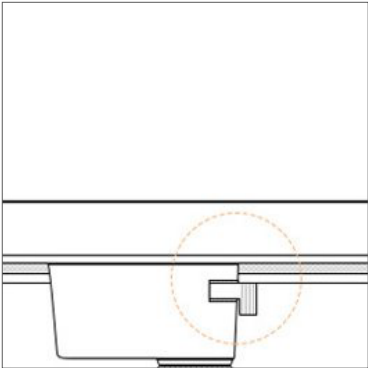

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails