

Track light SFL series 30W GS-TL30WLO66










Product parameter

LED power	: 27W(36vDC 750mA)
Lamp consumption	: 30W
Adapter	: 3 phase(4-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ66*L160mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |



Dimmable




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL30WLO66B	Bridgelux V9HD	2700K-7000K single color	3200-3400lm	2700-3000lm	2500-2800lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL30WLO66H	GOSUN 1206H		no	3300-3600lm	no	
GS-TL30WLO66C	CITIZEN 1205		3200-3400lm	2700-3000lm	2500-2800lm	
GS-TL30WLO66TC	TYANSHINE	2700k-5700k tunable	no	1800-2200lm	no	
GS-TL30WLO66Y	TYANSHINE	RGBCW	2000-2300lm			

Packing

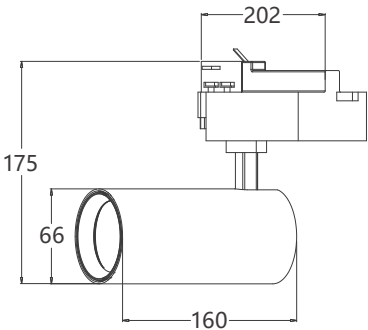


XXXXXXXcm




52x41x35cm(16 pcs/carton, 12.5kg)

Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

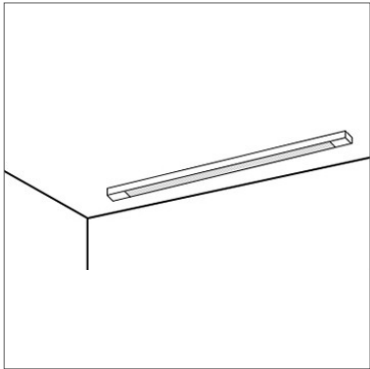


1. Fix the track rails on the suspended ceiling

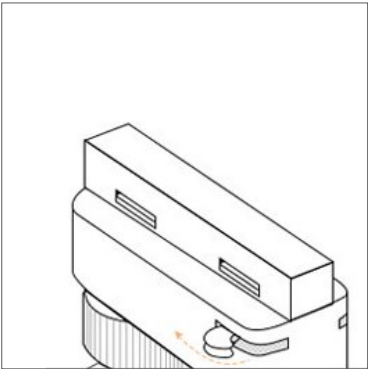

2. Make the power adaptor set to OFF

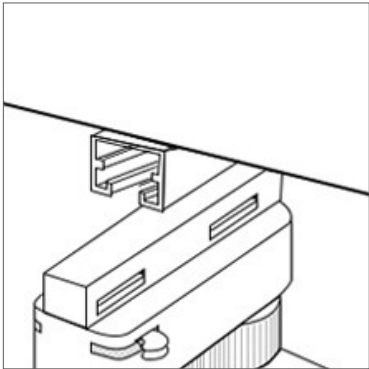

3. Embed the track light on the track rails

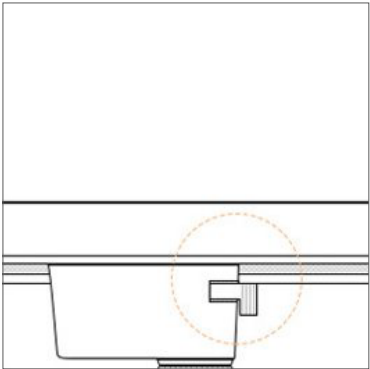

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails