

Track light SFE series 32W GS-TL32WEI88



Product parameter








LED power : 28.8W(36vDC 800mA)
Lamp consumption : 32W
Adapter : Powergear 3 phase(4-wire, 6-wire)
Input voltage : 200-240vAC
UGR : (Lens 12-15)(Reflector 15-19)
Size : φ88*L160mm
Life span : 50,000 hrs
Warranty : 5 years
Beam angle : (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable



Single color dimmable TRIAC/0-10V/DALI 1800-3000K dim to warm TRIAC/0-10v




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL32WEI88B	Bridgelux V13C	2700K-7000K single color	3300-3600lm	2000-3300lm	2800-3100lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL32WEI88H	GOSUN 1208H		no	3600-3900lm	no	
GS-TL32WEI88C	CITIZEN1206		3300-3600lm	3000-3300lm	2800-3100lm	
GS-TL32WEI88TP	TYANSHINE	3000k/4000k/5700k	no	2200-2500lm	no	

Packing




10.5x9.8x27cm




56X31X33cm(15 pcs/carton, 15.3kg)

Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

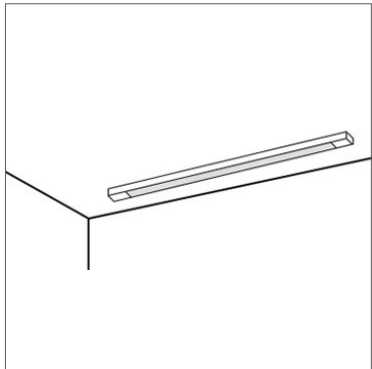


1. Fix the track rails on the suspended ceiling

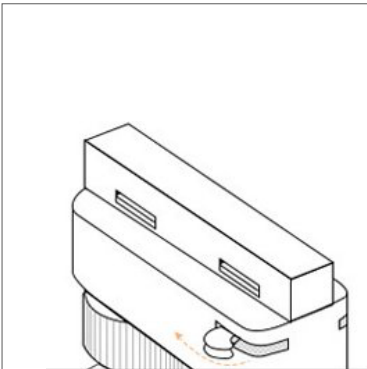

2. Make the power adaptor set to OFF

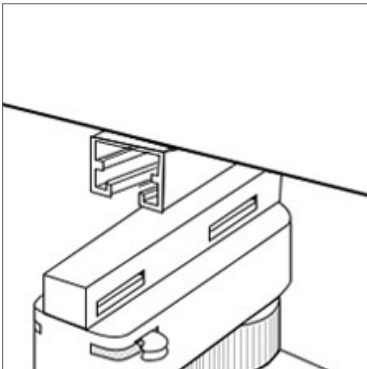

3. Embed the track light on the track rails

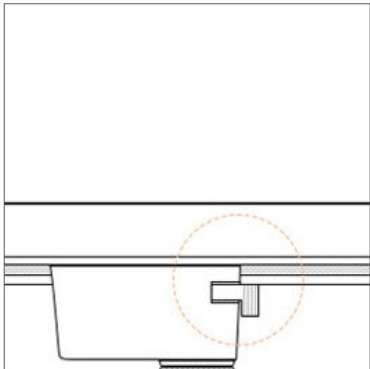

4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails