

Track light SFZ series 32W GS-TL32WZI88



Product parameter

LED power	: 28.8W(36vDC 800mA)
Lamp consumption	: 32W
Adapter	: Powergear 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: Lens 12-15
Size	: φ88*L168mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 15°-60° zoomable



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700k

3000k

3500k

4000k





5000k

6000k

1800-3000K dim to warm TRIAC/0-10v





1800k-3000k




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL32WZI88C	CITIZEN1206	2700K-7000K single color	3000-3400lm	2700-3000lm	2400-2700lm	15°-60° zoomable
GS-TL32WZI88T	TYANSHINE	3000k/4000k/5700k	2200-3000lm	2000-2600lm	no	

Packing




10.5x9.8x27cm




54.5x29x31.5cm(15 pcs/carton, 13.5kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

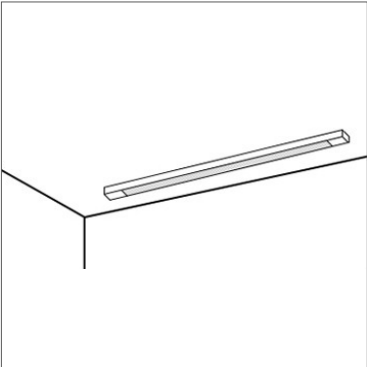


1. Fix the track rails on the suspended ceiling

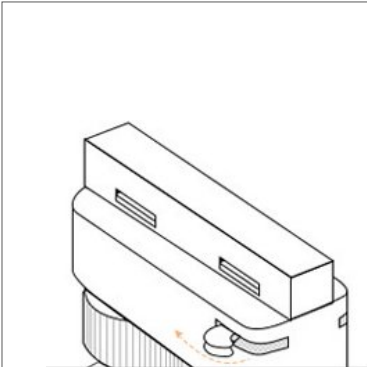

2. Make the power adaptor set to OFF

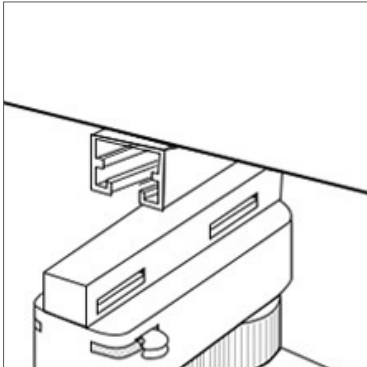

3. Embed the track light on the track rails

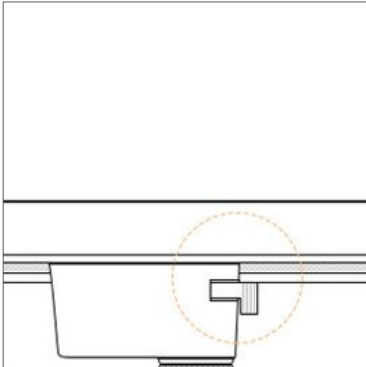

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails