

Track light SFL series36W GS-TL36WLI88










Product parameter

LED power	: 32.8W(36vDC 900mA)
Lamp consumption	: 36W
Adapter	: Powergear 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ88*L175mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)





Dimmable




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL36WLI88B	Bridgelux V13C	2700K-7000K single color	3700-4200lm	3400-3800lm	3200-3400lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL36WLI88H	GOSUN 1208H		no	4200-4600lm	no	
GS-TL36WLI88C	CITIZEN1206		3700-4200lm	3400-3800lm	3200-3400lm	
GS-TL36WLI88TP	TYANSHINE	3000k/4000k/5700k	no	2500-3000lm	no	

Packing




XXXXXXXcm




56X31X33cm(15 pcs/carton, 15.3kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

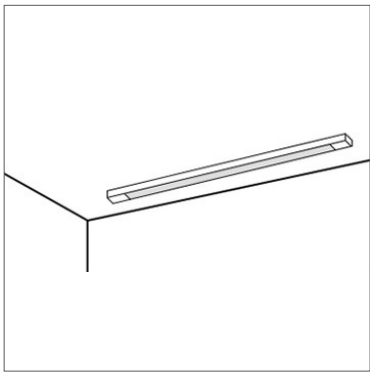


1. Fix the track rails on the suspended ceiling

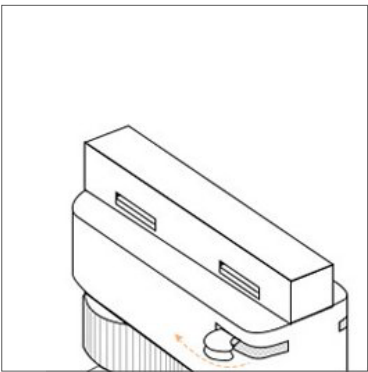

2. Make the power adaptor set to OFF

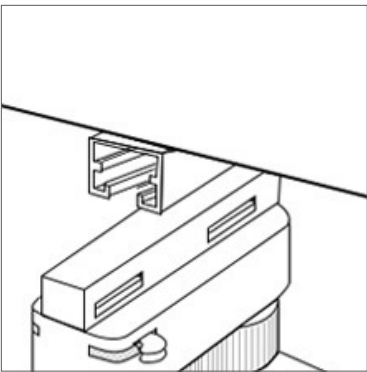

3. Embed the track light on the track rails

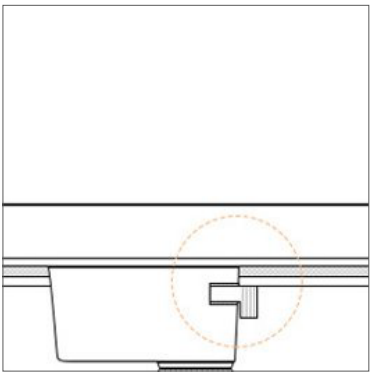

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails