

Track light SFL series 36W GS-TL36WLO77





Product parameter

LED power	: 32.4W(36vDC 900mA)
Lamp consumption	: 36W
Adapter	: 3 phase(4-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ77*L170mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |


Dimmable

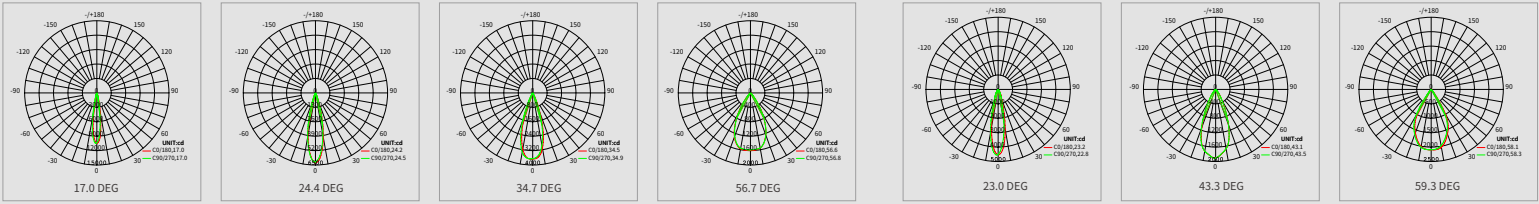

Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL36WLO77B	Bridgelux V13C	2700K-7000K single color	3700-4200lm	3400-3800lm	3200-3400lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL36WLO77H	GOSUN 1208H		no	4200-4600lm	no	
GS-TL36WLO77C	CITIZEN 1206		3700-4200lm	3400-3800lm	3200-3400lm	
GS-TL36WLO77TC	TYANSHINE	2700k-5700k tunnable	no	2500-3000lm	no	
GS-TL36WLO77Y	TYANSHINE	RGBCW	2200-2500lm			

Packing

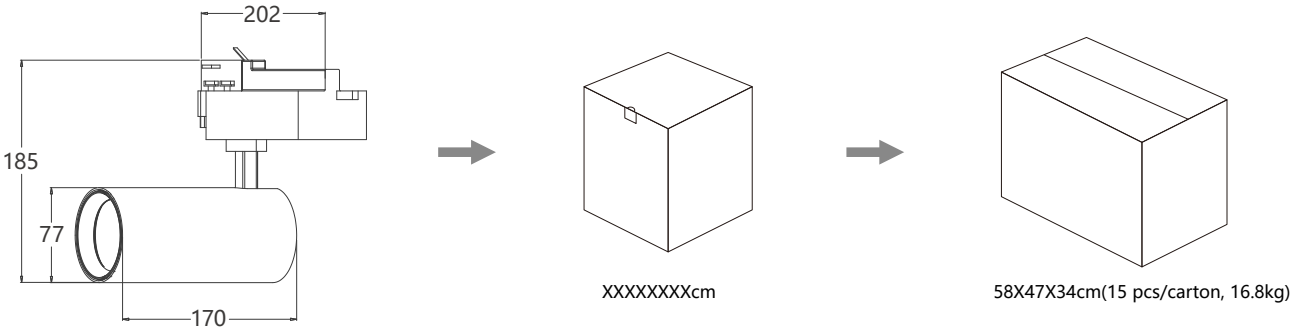

Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

1. Fix the track rails on the suspended ceiling
2. Make the power adaptor set to OFF
3. Embed the track light on the track rails
4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure thetheadaptor be locked in the track rails