

Track light SFE series 40W GS-TL40WEI99




Product parameter

LED power	: 36W(36vDC 1000mA)
Lamp consumption	: 40W
Adapter	: Powergear 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 12-15)(Reflector 15-19)
Size	: φ99*L160mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)



Dimmable


Single color dimmable TRIAC/0-10V/DALI	1800-3000K dim to warm TRIAC/0-10v
 2700k 3000k 3500k 4000k 5000k 6000k	 1800k-3000k

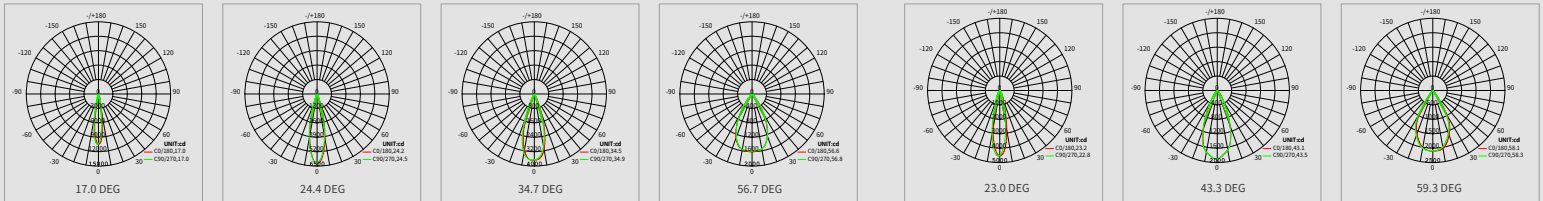


Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL40WEI99B	Bridgelux V13C	2700K-7000K single color	4100-4400lm	3800-4000lm	3500-3700lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL40WEI99H	GOSUN 1210H		no	4500-4900lm	no	
GS-TL40WEI99C	CITIZEN1208		4100-4400lm	3800-4000lm	3500-3700lm	
GS-TL40WEI99TP	TYANSHINE	3000k/4000k/5700k	no	2800-3700lm	no	


Packing

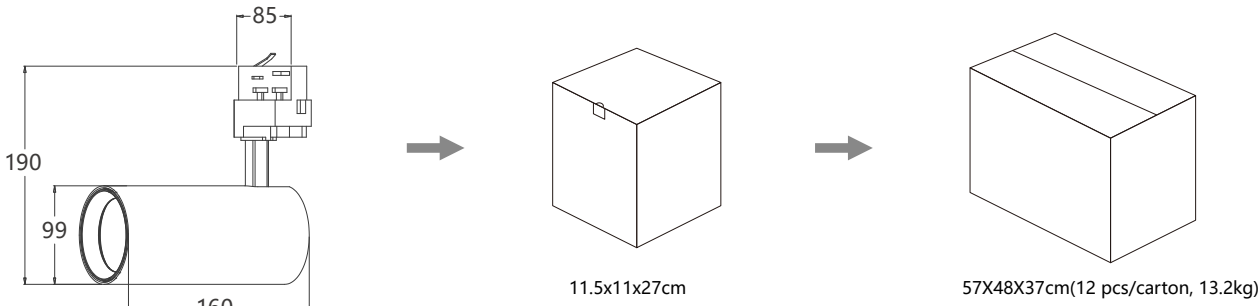


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

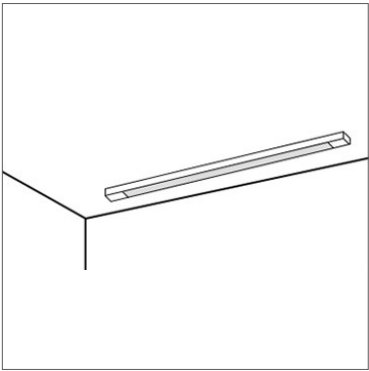


1. Fix the track rails on the suspended ceiling

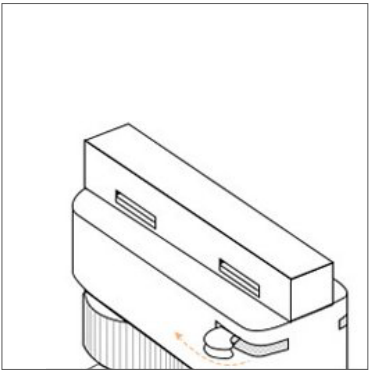

2. Make the power adaptor set to OFF

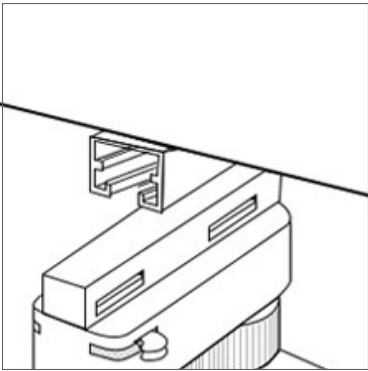

3. Embed the track light on the track rails

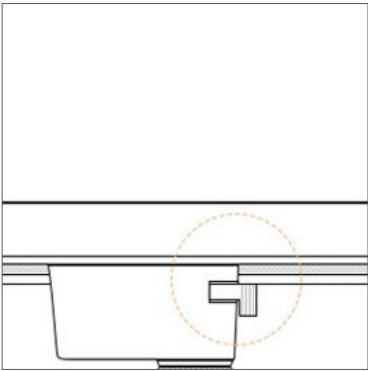

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails