

Track light SFE series 42W GS-TL42WEC99



Product parameter

LED power : 37.8W(36vDC 1050mA)
Lamp consumption : 42W
Adapter : 3 phase(4-wire, 6-wire)
Input voltage : 200-240vAC
UGR : (Lens 12-15)(Reflector 15-19)
Size : φ99*L160mm
Life span : 50,000 hrs
Warranty : 5 years
Beam angle : (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)










2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable

Single color dimmable TRIAC/0-10V/DALI





1800-3000K dim to warm TRIAC/0-10v




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL42WEC99B	Bridgelux V13C	2700K-7000K single color	4300-4600lm	3900-4200lm	3600-3700lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL42WEC99H	GOSUN 1210H		no	4800-5200lm	no	
GS-TL42WEC99C	CITIZEN 1208		4300-4600lm	3900-4200lm	3600-3700lm	
GS-TL42WEC99TP	TYANSHINE	3000k/4000k/5700k	no	2900-3600lm	no	
GS-TL42WEC99TC		2700-5700K tunable				

Packing

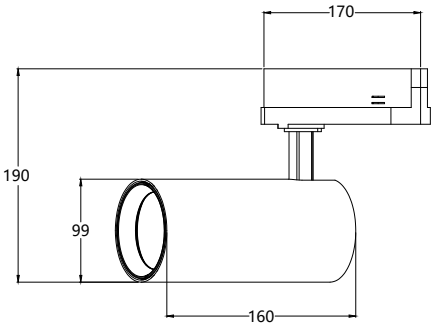


24.3x12.5x27.3cm




58X52X41cm(12 pcs/carton, 19.8kg)

Installation Instuction


Warning: Make sure that the power on the track rail is off before installation.

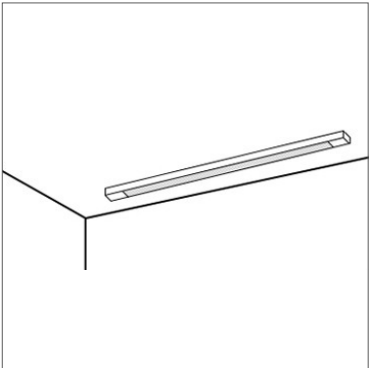


1. Fix the track rails on the suspended ceiling

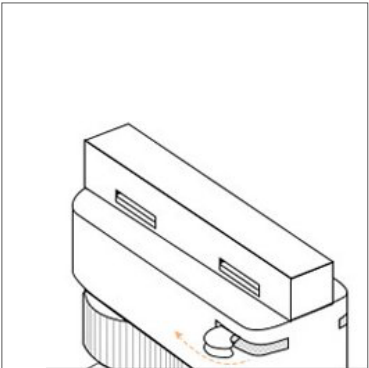

2. Make the power adaptor set to OFF

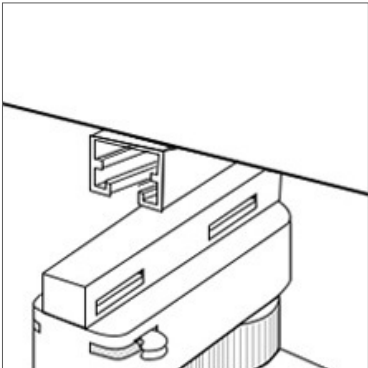

3. Embed the track light on the track rails

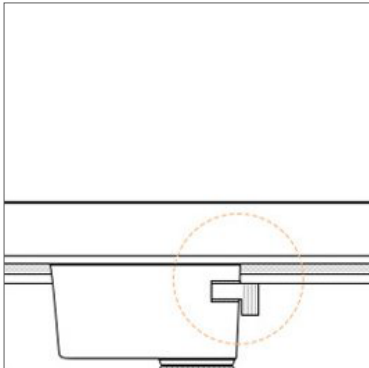

4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails