

Track light SFZ series 42W GS-TL42WZU99



Product parameter

LED power	: 37.8W(36vDC 1050mA)
Lamp consumption	: 42W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: Lens 12-15
Size	: φ99*L157mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: 15°-60° zoomable



2700K | 3000K | 3500K | 4000K | 5000K | 6000K |

Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700k

3000k

3500k

4000k

5000k

6000k

1800-3000K dim to warm TRIAC/0-10v



1800k

3000k

2700-6000K tunable 2.4G/DALI DT8/Casambi



2700k





3000k

3500k

4000k

5000k



6000k




Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI96	
GS-TL42WZU99B	Bridgelux V13C	2700K-7000K single color	3600-4000lm	3400-3800lm	3000-3400lm	15°-60° zoomable
GS-TL42WZU99H	GOSUN 1210H		no	4000-4200lm	no	
GS-TL42WZU99C	CITIZEN1208		3600-4000lm	3400-3800lm	3000-3400lm	
GS-TL42WZU99TC	TYANSHINE	2700-5700k tunable	3000-3500lm	2500-3000lm	no	

Packing




25.5x18x12cm




53x38x26cm(8 pcs/carton, 8kg)


Installation Instuction Warning: Make sure that the power on the track rail is off before installation.

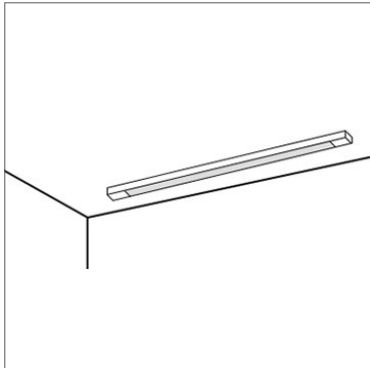


1. Fix the track rails on the suspended ceiling

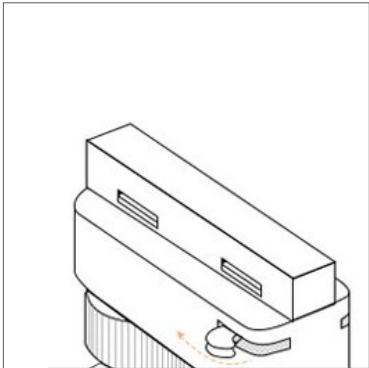

2. Make the power adaptor set to OFF

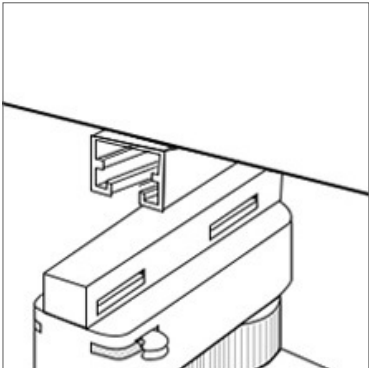

3. Embed the track light on the track rails

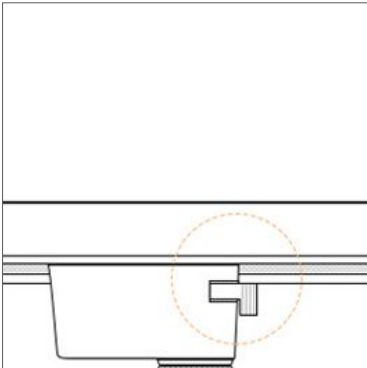

4. Turn the handle 90° degrees according the direction as shownin the left picture,make sure theadaptor be locked in the track rails