

Track light SFL series 20W GS-TL20WLC55




Product parameter

LED power	: 18W(36vDC 500mA)
Lamp consumption	: 20W
Adapter	: 3 phase(4-wire, 6-wire)
Input voltage	: 200-240vAC
UGR	: (Lens 10-15)(Reflector 13-19)
Size	: φ55*L150mm
Life span	: 50,000 hrs
Warranty	: 5 years
Beam angle	: (Lens15°/24°/36°/60°)(Reflector: 30°/40°/60°)




Dimmable

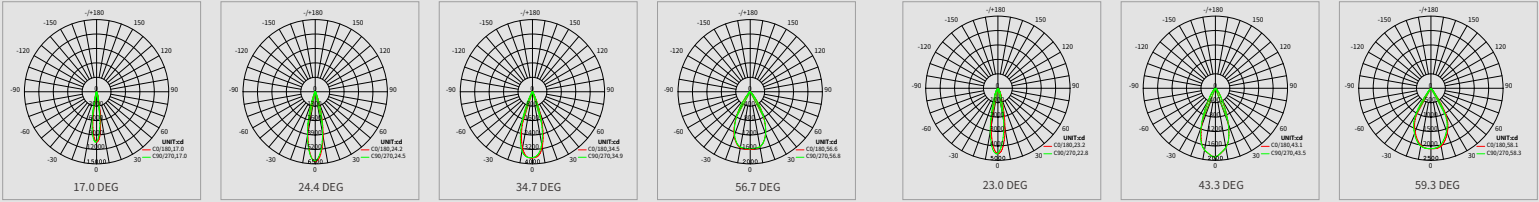

Datasheet

Part No.	COB brand	CCT	Output			Beam angle
			CRI80	CRI90	CRI97	
GS-TL20WLC55B	Bridgelux V10A	2700K-7000K single color	2100-2400lm	1900-2100lm	1700-2000lm	Reflector 30°/40°/60° Lens 15°/24°/36°/60°
GS-TL20WLC55H	GOSUN 1204H		no	2300-2600lm	no	
GS-TL20WLC55C	CITIZEN 1204		2100-2400lm	1900-2100lm	1700-2000lm	
GS-TL20WLC55TP	TYANSHINE	3000k/4000k/5700k	no	1400-1800lm	no	
GS-TL20WLC55TC		2700k-5700k tunable				

Packing

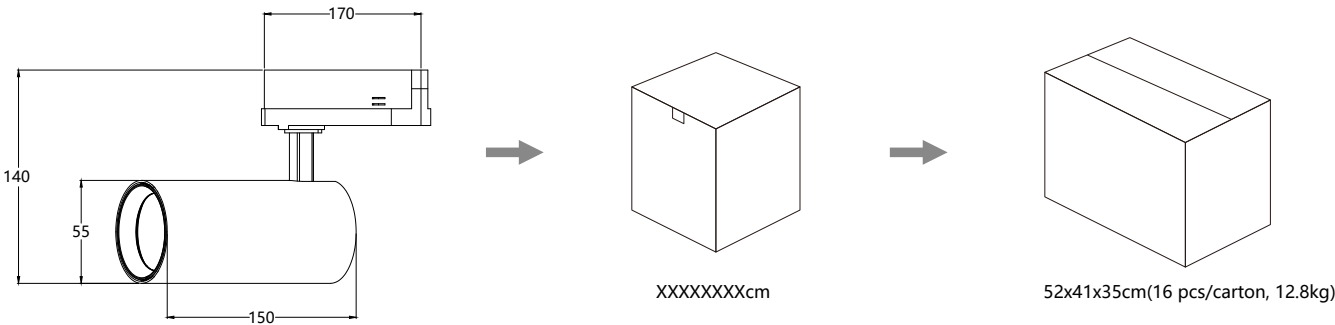

Installation Instuction

Warning: Make sure that the power on the track rail is off before installation.

1. Fix the track rails on the suspended ceiling
2. Make the power adaptor set to OFF
3. Embed the track light on the track rails
4. Turn the handle 90° degrees according to the direction as shown in the left picture, make sure the adaptor be locked in the track rails